



Nuova Rade

Marine - Plastics Technology Experts



2015




Nuova Rade

Marine - Plastics Technology Experts

Nuova Rade is the biggest manufacturing facility in Europe for marine plastics.

For more than **50 years** is the leading company in design and production of plastic accessories for the boating trade!

Our mission is to improve our product design and quality every day, so that our Clients always think of us first, in their search for marine plastic components and solutions. In order to achieve that we dedicate ourselves to innovation, imagination and creativity while keeping reliability, functionality practicality and price at the forefront of the process.

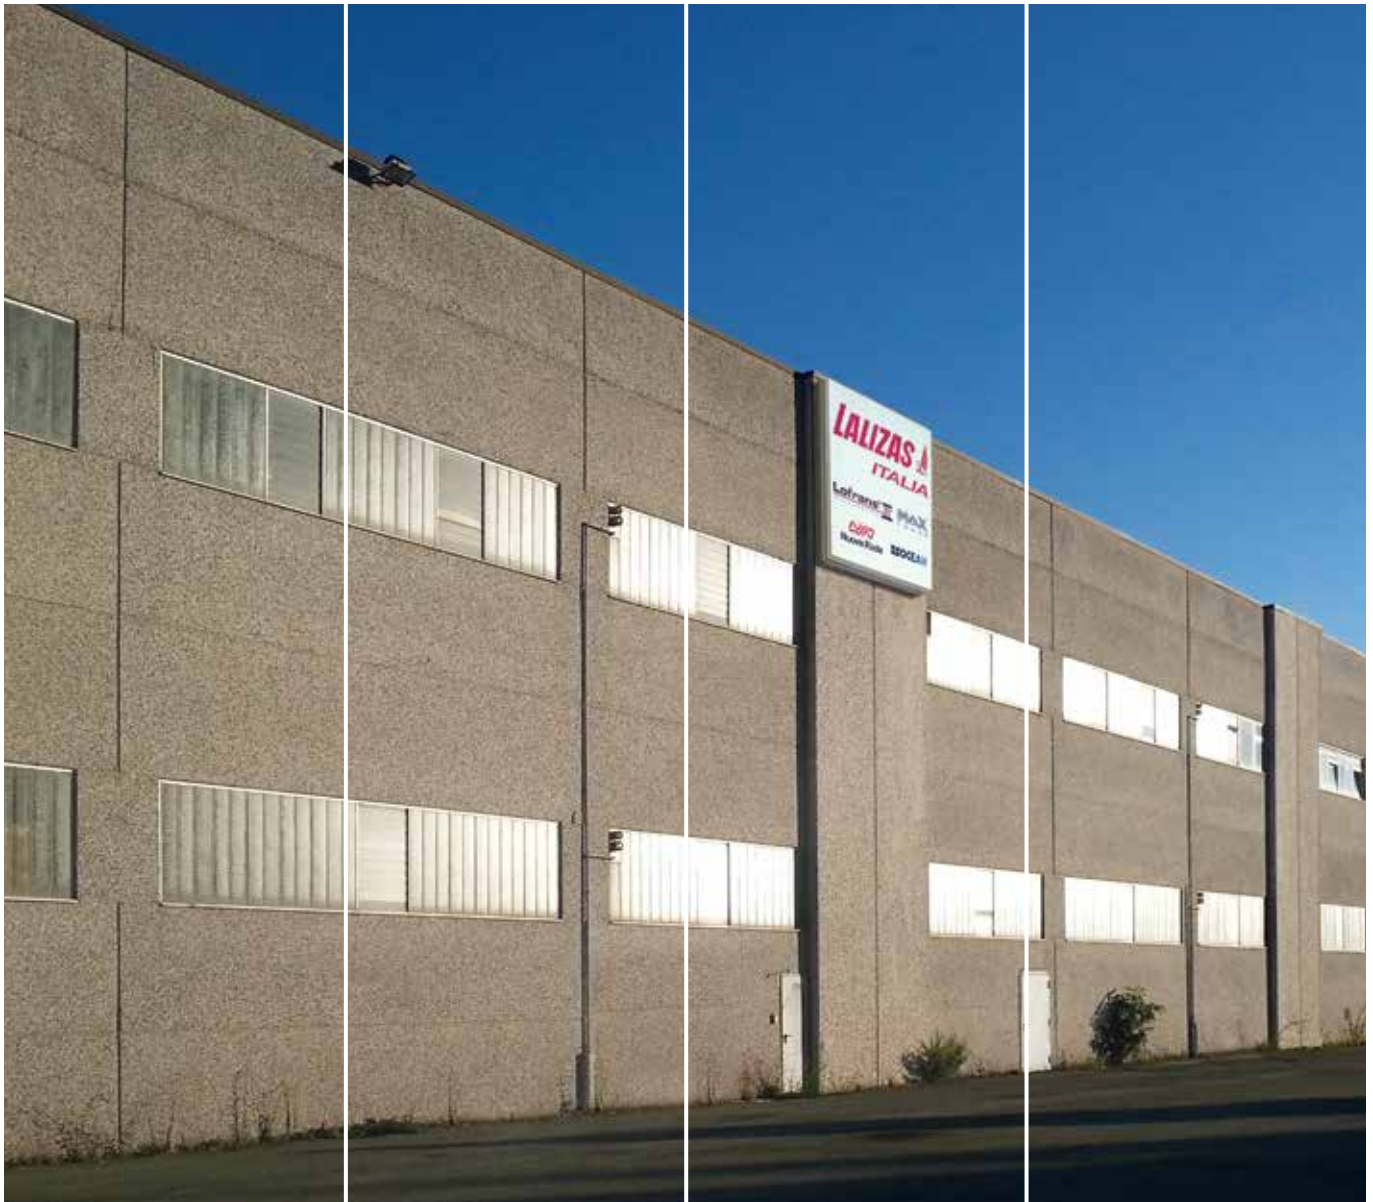

made in Italy



“We will always manufacture the best marine plastic products for boating”



Our staff uses the latest -state of the art- computer guided technology to provide (deliver) premium and precise products even if they have to create custom trophies! Since quality is a top priority, human intervention is only allowed and present in the quality control due to the fact that we want to reassure ourselves that we deliver products of superior quality.





Nuova Rade

Marine - Plastics Technology Experts

Hatches

Portlight - Escape Hatches

Euro 1 & 2


268x448mm



Euro 1 (45x27 cm)
ASA - UV resistant

Code	Colour	Optional Spare Parts			
		Opening Stay	Handle	Gasket	Spare Key
47079	White	 47089	 195425	 44561 (1,2m, Ø9mm)	 196053

A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)	P (mm)	Q (mm)
268	448	196	376	209	389	25-55	22



Plexiglas Thickness: 8mm



480x480mm



Euro 2 (48x48 cm)
ASA - UV resistant

Code	Colour	Optional Spare Parts			
		Opening Stay	Set of left and right handles	Gasket	Spare Key
44445	White	 44839	 44208	 44560 (1,6m, Ø9mm)	 196053

A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)	P (mm)	Q (mm)
480	480	415	415	430	430	25-55	22



Plexiglas Thickness: 8mm



Portlight - Escape Hatches

Euro 38 & 57

Ø38mm
Ø57mm




Plexiglas Thickness: 8mm

EURO Ø38 - Ø57 Escape Hatches ASA - UV resistant

Code	Model	Colour	Optional Spare Parts			
			Opening Stay	Set of left and right handles	Gasket	Spare Key for Deck Filler
195256	Euro Ø 38	White				
195254	Euro Ø 57					
			Euro Ø 38: 195541 Euro Ø 57: 195542	195540	44560 (1,6m, Ø9mm)	196053


Code	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	N (mm)
195256	378	189	26	294	316	362	309	22.5-52.5
195254	590	294.5	27	506	518	574	521	22.5-52.5

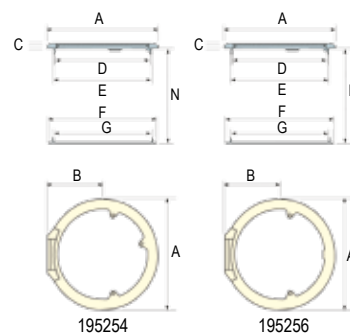

Deck Hatches

Krome

353x606mm
315x440mm
270x375mm
243x607mm
370x375mm
460x510mm

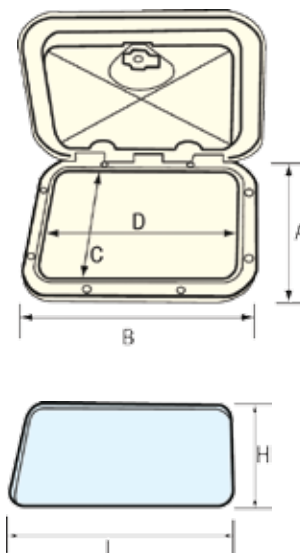

KROME Hatches with chromed handles ASA - UV resistant

Code	Colour	A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)	Optional Spare Parts		
196513	White	270	375	183	289	200	300	Lock	Handle	Gasket
196514		315	440	237	357	243	363			
196515		353	606	266	520	283	530			
196516		243	607	162	521	173	530			
196517		370	375	283	289	300	300			
196518		460	510	373	433	390	445			
								44813	196494 (chromed)	44554 (1,7m)

* Special colours available upon request.

Deck Hatches

Top Line

270x375mm


TOP LINE Hatches

ASA - UV resistant



Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196279	Standard	White			
196293		Grey			
196286		Cream			
196280	With lock	White	44813	44206 (White) 44207 (Grey) 47738 (Cream)	44554 (1,7m)
196294		Grey			
196287		Cream			

A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)
270	375	183	289	200	300




TOP LINE Storage Hatches

ASA - UV resistant



Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196281	Standard	White			
196295		Grey			
196288		Cream			
196282	With lock	White	44813	44206 (White) 44207 (Grey) 47738 (Cream)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
270	375	183	289	270	170	160	210	305





TOP LINE Storage Hatches with Drawers

ASA - UV resistant



Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196283	Standard	White			
196297		Grey			
196290		Cream			
196284	With lock	White	44813	44206 (White) 44207 (Grey) 47738 (Cream)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
270	375	183	289	270	170	160	210	305



* Special colours available upon request.

Deck Hatches

Top Line

315x440mm




TOP LINE Hatches

ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196300	Standard	White			
196306		Grey			
196303		Cream			
196301	With lock	White	44813	44206 (White) 44207 (Grey) 47738 (Cream)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)
315	440	237	357	243	363

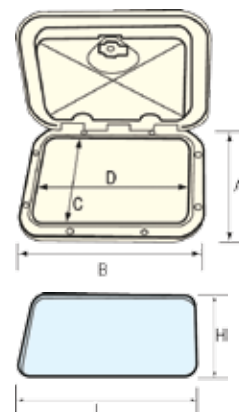

353x606mm




TOP LINE Hatches

ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196256	Standard	White			
196317		Grey			
196312		Cream			
196309	With lock	White	44813	44206 (White) 44207 (Grey) 47738 (Cream)	44554 (1,7m)
196318		Grey			
196313		Cream			

A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)
353	606	266	520	283	530

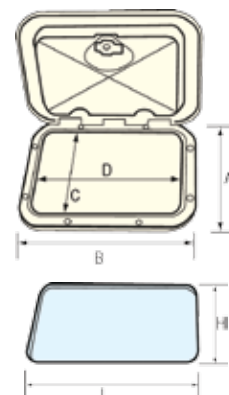


TOP LINE Storage Hatches

ASA - UV resistant

Code	Model	Colour	Optional Spare Parts					
			Lock	Handle	Gasket			
196310	Standard	White						
196314		Cream						
196311	With lock	White	44813	44206 (White) 47738 (Cream)	44554 (1,7m)			
196315		Cream						

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
353	606	266	520	495	250	325	290	540

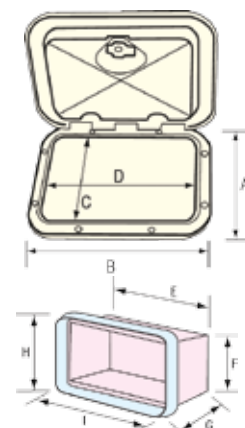

Deck Hatches

Top Line


243x607mm



TOP LINE Hatches
ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196322	Standard	White			
196328		Grey			
196325		Cream			
196323	With lock	White	44813	44206 (White) 44207 (Grey) 47738 (Cream)	44554 (1,7m)


A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)
243	607	162	521	173	530



TOP LINE Storage Hatches
ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196657	Standard	White			
196661		Grey			
196659		Cream			
196658	With lock	White	44813	44206 (White) 44207 (Grey) 47738 (Cream)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
243	607	162	521	513	151	182	177	542

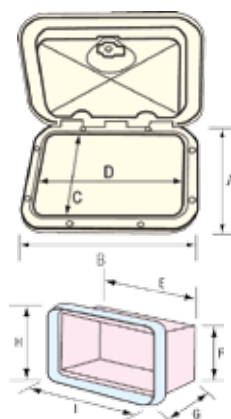


370x375mm



TOP LINE Hatches
ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196331	Standard	White			
196341		Grey			
196336		Cream			
196332	With lock	White	44813	44206 (White) 44207 (Grey) 47738 (Cream)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)
370	375	283	289	300	300

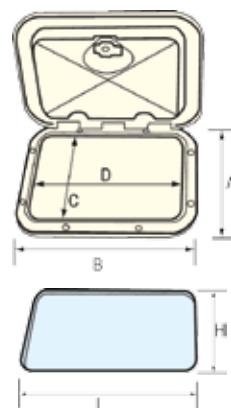

* Special colours available upon request.

Deck Hatches

Top Line


370x375mm



TOP LINE Storage Hatches
ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196333	Standard	White			
196343		Grey			
196338		Cream			
196334	With lock	White	44813	44206 (White) 44207 (Grey) 47738 (Cream)	44554 (1,7m)
196344		Grey			
196339		Cream			

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
370	375	283	289	305	310	245	320	310

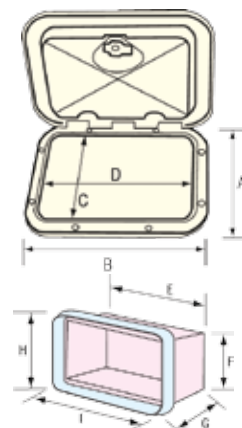


460x510mm



TOP LINE Hatches
ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196346	Standard	White			
196356		Grey			
196351		Cream			
196347	With lock	White	44813	44206 (White) 44207 (Grey) 47738 (Cream)	44554 (1,7m)
196357		Grey			
196352		Cream			


A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)
460	510	373	433	390	445

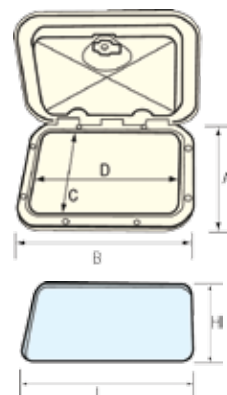

TOP LINE Storage Hatches
ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196348	Standard	White			
196349	With lock	White			
			44813	44206 (White)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
460	510	373	433	410	350	330	395	445

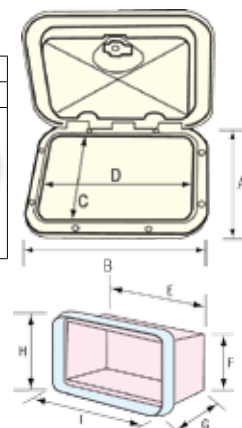

* Special colours available upon request.

Deck Hatches

Top Line

356x397mm




Supplied with fixing strap for the gas bottle.

TOP LINE Storage Hatches
for Gas Bottle 3 kg
ASA - UV resistant

Code	Model	Colour	Optional Spare Parts			
			Lock	Handle	Gasket	Strap
196257	Interrupted gasket	White				
196258		Cream				
196259	Whole gasket	White	44813	44206 (White) 47738 (Cream)	44554 (1,7m)	43895 (1,3m)

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
356	397	289	323	300	330	240	305	338

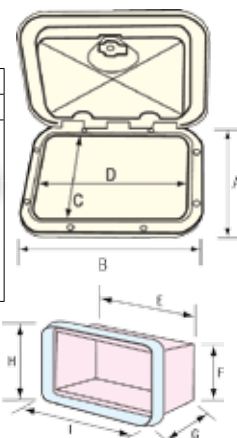

To be installed as per DIR 24/25 EC ANNEX 1 PAR 5.5

Mid Line


355x600mm



MID LINE Hatches
ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196849	Standard	White			
196852	With lock	White			
			44813	44206 (White)	44554 (1,7m)


A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)
355	600	250	500	275	524

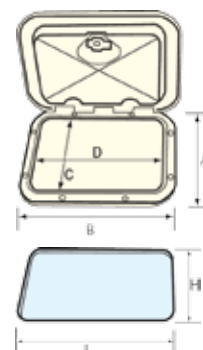

MID LINE Storage Hatches
ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196855	Standard	White			
196858	With lock	White			
			44813	44206 (White)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
355	600	250	500	520	280	320	285	535

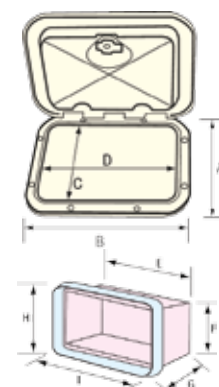

⊛ Special colours available upon request.

Deck Hatches

Mid Line


278x378mm



MID LINE Hatches
ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196812	Standard	White			
196815	With lock				
			44813	44206 (White)	44554 (1,7m)


A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)
278	378	175	275	198	296

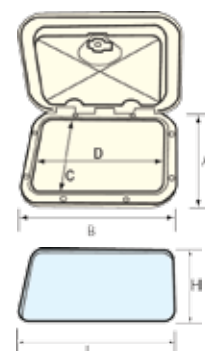

MID LINE Storage Hatches
ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196818	Standard	White			
196821	With lock				
			44813	44206 (White)	44554 (1,7m)


A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
278	378	175	275	270	170	160	210	305

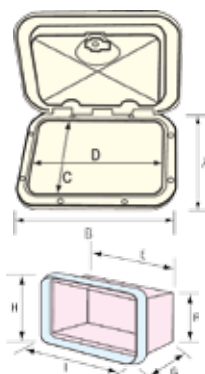

MID LINE Storage Hatches with Drawers
ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196824	Standard	White			
196827	With lock				
			44813	44206 (White)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
278	378	175	275	270	170	160	210	305




380x380mm



MID LINE Hatches
ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196833	Standard	White			
196836	With lock				
			44813	44206 (White)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)
380	380	275	275	305	305

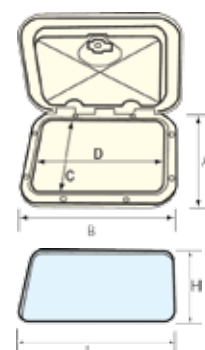

* Special colours available upon request.

Deck Hatches

Mid Line

380x380mm




MID LINE Storage Hatches

ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196839	Standard	White			
196842	With lock				
			44813	44206 (White)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
380	380	275	275	280	280	250	315	315

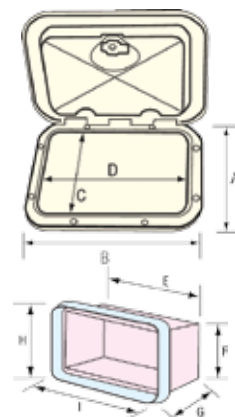

Classic

275x375mm




CLASSIC Hatches

ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196567	Standard	White			
196577		Grey			
196586		Cream			
196569	With lock	White	44813	44206 (White) 44207 (Grey) 47738 (Cream)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)
275	375	180	280	198	298

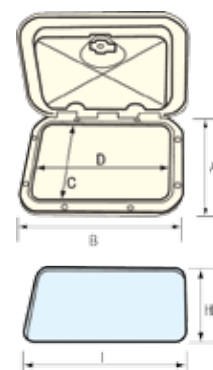


CLASSIC Storage Hatches

ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196570	Standard	White			
196571	With lock				
			44813	44206 (White)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
275	375	180	280	270	170	160	210	305

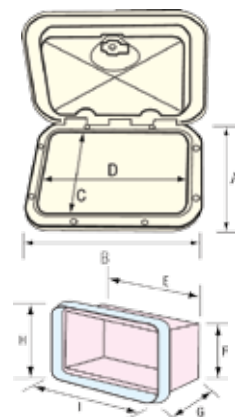

Our hatches are supplied with screw hole covers

✱ Special colours available upon request.

Deck Hatches

Classic

275x375mm




CLASSIC Storage Hatches with Drawers

ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196572	Standard	White			
196573	With lock				
			44813	44206 (White)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
275	375	180	280	270	170	160	210	305

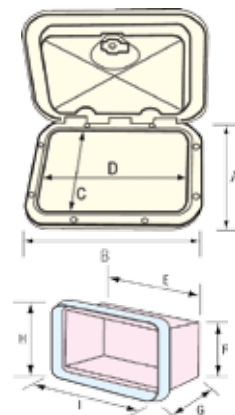


CLASSIC Hatches with Storage Bag

ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196574	Standard	White			
196575	With lock				
			44813	44206 (White)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	G (mm)	H (mm)	I (mm)
275	375	180	280	220	198	298



355x600mm




CLASSIC Hatches

ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196596	Standard	White			
196604		Grey			
196598	With lock	White	44813	44206 (White) 44207 (Grey)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)
355	600	250	500	275	524

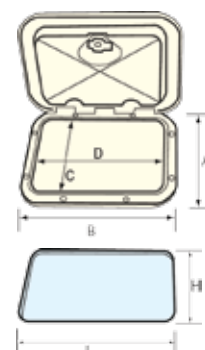

* Special colours available upon request.

Deck Hatches

Classic


355x600mm



CLASSIC Storage Hatches
ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196599	Standard	White			
196600	With lock				
			44813	44206 (White)	44554 (1,7m)


A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
355	600	250	500	495	245	325	280	535

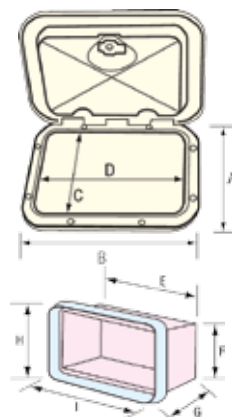

CLASSIC Hatches with Storage Bag
ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196601	Standard	White			
196602	With lock				
			44813	44206 (White)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	G (mm)	H (mm)	I (mm)
355	600	250	500	220	275	524

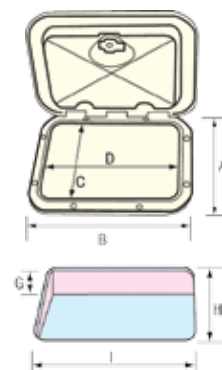


463x517mm



CLASIC Hatches
ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196619	Standard	White			
196626		Grey			
196633		Cream			
196620	With lock	White	44813	44206 (White) 44207 (Grey) 47738 (Cream)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)
463	517	362	416	386	442

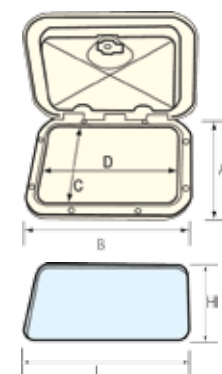

Our hatches are supplied with screw hole covers

 Special colours available upon request.

Deck Hatches

Classic


463x517mm



CLASSIC Storage Hatches
ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196621	Standard	White			
196622	With lock				
			44813	44206 (White)	44554 (1,7m)


A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
463	517	362	416	410	350	290	395	445

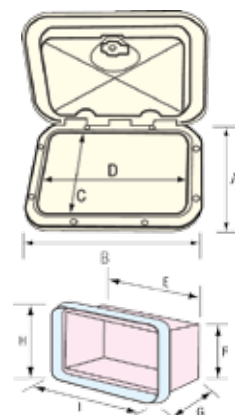

CLASSIC Hatches with Storage Bag
ASA - UV resistant

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196623	Standard	White			
196624	With lock				
			44813	44206 (White)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	G (mm)	H (mm)	I (mm)
463	517	362	416	220	386	442

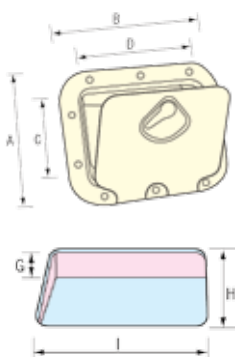

275x375mm

CLASSIC Hatch with Removable Cover 275x375
ASA

With removable cover

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196568	Standard	White			
			44813	44206 (White)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)
275	375	180	280	198	298



355x600mm

CLASSIC Hatch with Removable Cover 355x600
ASA

Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
196597	Standard	White			
196612		Cream			
			44813	44206 (White) 47738 (Cream)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)
355	600	250	500	275	524



* Special colours available upon request.

Our hatches are supplied with screw hole covers

Deck Hatches

Industrial

Access and Inspection Hatches

Access and Inspection Hatches are ideal for easily reaching and controlling various areas on board, such as fuel lines, electrical cables, gauges, controls, even the engine. They are specially designed with a non-skid surface and can be mounted horizontally, as well as, vertically. All hatches are mounted with hidden screws for discrete appearance. They feature an O-ring seal that makes the hatch watertight, 180° opening door, with one or two handles, where you can install a lock and an O-ring seal that makes the hatch watertight. All hatches are made of tough, UV resistant PP (polypropylene) plastic, impervious to chemical solvents and are designed for external use.

201x280mm
240x334mm


NEW



Inspection Hatches

PP - UV resistant

Code	Model	Colour	A (mm)	B (mm)	C (mm)	Optional Spare Parts	
						Lock	Gasket
10266	Standard	White	201	280	208		
10268		Grey					
10270		White	240	334	265		
10272		Grey					
						44810	70143 (2m)

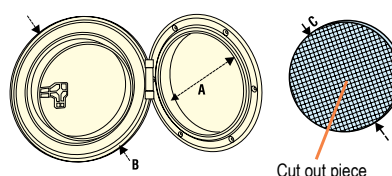

276x376mm
250x606mm
358x606mm
460x511mm


NEW



Access Hatches

PP - UV resistant

Code	Model	Colour	A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)	Optional Spare Parts	
									Lock	Gasket
10262	Standard	White	276	376	193	293	200	300		
10263		Grey								
11103		White	250	606	167	524	173	530		
11104		Grey								
10264		White	358	606	275	525	280	530		
10265		Grey								
11101		White	460	511	380	436	386	442		
11102		Grey								
									44810	70143 (2m)

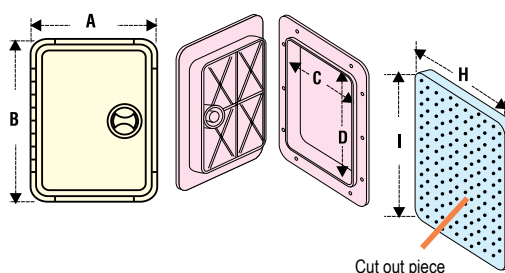

Special colours available upon request.

Deck Hatches

Industrial

95x154mm
122x181mm
145x210mm

NEW




Inspection Hatches with Detachable Cover

The Inspection Hatches with Detachable Cover are made of tough plastic for extra resistance to the sun, water, salt and detergents containing acetone. They have no hinges, so that you can completely remove the cover. Their opening is easy, since the specially designed thread automatically ejects the cover, once you turn it 90° counter clockwise. Furthermore, they feature non-skid surface and hidden screws for smarter appearance.

Inspection Hatches with Detachable Cover PP - UV resistant

Code	Colour	A (mm)	B (mm)	C (mm)
11107	White	95	154	113,5
11109		122	181	141
11111		145	210	164

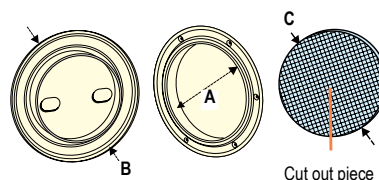

316x366mm

NEW




Access Hatches with Detachable Cover

Access Hatches with Detachable Covers are made of tough UV resistant PP (polypropylene) plastic material, impervious to chemical solvents and are ideal both for internal and external use. They feature a completely detachable door for ease of use and handles that can be fitted with a lock. The non-skid surface and the hidden screws are additional important features.

Access Hatches with Detachable Cover PP - UV resistant

Code	Model	Colour	A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)	Optional Spare Parts	
									Lock	Gasket
11105	Standard	White	316	366	226	276	250	300		
11106		Grey								
									44810	70143 (2m)

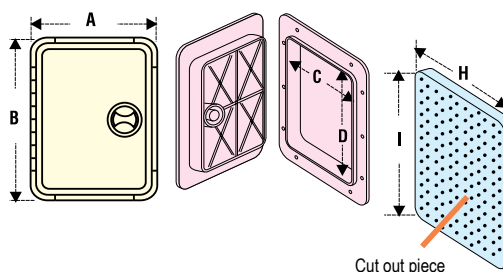

Inspection Hatches


Inspection Hatches Ø 190mm

ASA, UV resistant



Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
42791	Standard	White			
47726		Cream			
46580		Grey			
			44810	44197 (White) 44198 (Grey) 47737 (Cream)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)
190	265	219	210




Inspection Hatches Ø 235mm

ASA, UV resistant



Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
43565	Standard	White			
47725		Cream			
46579		Grey			
			44810	44197 (White) 44198 (Grey) 47737 (Cream)	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)
235	315	265	250



With removable cover


Inspection Hatches 306 x 356

ASA, UV resistant



Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
45163	Standard	White			
45164		Grey			
45166	With lock	White	44810	44197 (White) 44198 (Grey)	44556 (1,5m)

A (mm)	B (mm)	C (mm)	D (mm)
306	356	246	296



With removable cover


Inspection Hatches 380 x 380

ASA, UV resistant



Code	Model	Colour	Optional Spare Parts		
			Lock	Handle	Gasket
45175	Standard	White			
45176		Grey			
45178	With lock	White	44810	44197 (White) 44198 (Grey)	44556 (1,5m)

A (mm)	B (mm)	C (mm)	D (mm)
380	380	295	295




* Special colours available upon request.

Inspection Hatches




Inspection Hatches
ASA, UV resistant

Code	Colour	A (mm)	B (mm)	C (mm)	Optional Spare Key
195380	White	100	145	114	
195381		125	170	139	
195382		150	205	165	

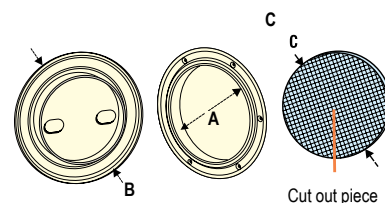


Inspection Hatches
ASA, UV resistant
Self centering tread with o-ring water resistant

Code	Colour	A (mm)	B (mm)	C (mm)
196434	White	108	162	120
196439	Cream	108	162	120
196441	Grey	108	162	120
196443	White	133	187	145
196448	Cream	133	187	145
196450	Grey	133	187	145
196452	White	168	222	180
196457	Cream	168	222	180
196459	Grey	168	222	180

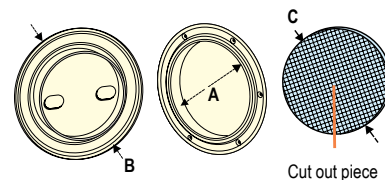


Inspection Hatches with Pressure Lock
ASA, UV resistant

Code	Colour	A (mm)	B (mm)	C (mm)
196437	White	108	162	120
196446		133	187	145
196455		168	222	180

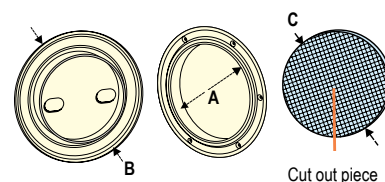

Inspection Hatches with Removable Bag
ASA, UV resistant
Self centering tread with o-ring water resistant

Code	Colour	A (mm)	B (mm)	C (mm)
196435	White	108	162	120
196444		133	187	145
196453		168	222	180

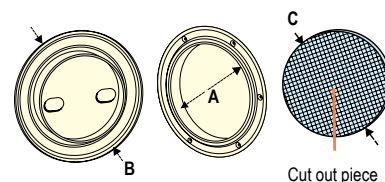


* Special colours available upon request.

Inspection Hatches

Inspection Hatches
ASA, UV resistant
Rotating lock and bayonet with O-Ring



Code	Colour	A (mm)	B (mm)	C (mm)
43909	White	104	143	115
43918		130	170	142
43927		155	200	168
43910	Black	104	143	115
43919		130	170	142
43928		155	200	168
47731	Cream	104	143	115
47732		130	170	142
47733		155	200	168

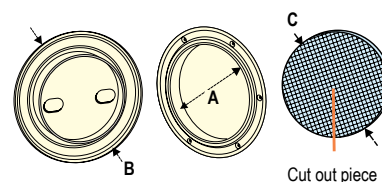


Storage Hatches

Utility Storage Hatch with Lid
ASA, UV resistant



Code	Model	Colour	Optional Spare Parts
			Gasket
196376	Standard	White	 44558 (1,56m)




A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)
110	81	8	150	235	198	75	192

Utility Storage Hatch Oval
ASA, UV resistant



Code	Model	Colour	Optional Spare Parts
			Gasket
196805	Standard	White	 44554 (1,7m)

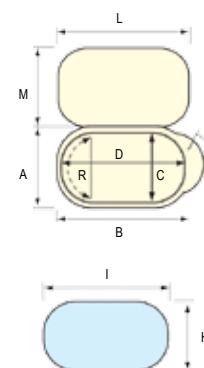

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	L (mm)	M (mm)	R (mm)
120	210	85	170	65	91	176	220	130	80		

* Special colours available upon request.


Storage Hatches



Hatches for VHF/RadioCD
ASA, UV resistant

Code	Model	Colour	Optional Spare Parts	
			Lock	Gasket
196361	Standard	White		
196362	With lock			
196366	Standard	Cream	44810	44556 (1,5m)


A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	I (mm)	J (mm)
165	285	108	226	132	250	180

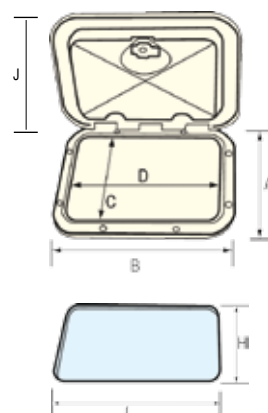

Storage Hatches for VHF/RadioCD
ASA, UV resistant

Code	Model	Colour	Optional Spare Parts	
			Lock	Gasket
196363	Standard	White		
196364	With lock			
			44810	44556 (1,5m)


A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)
165	285	108	226	250	140	250	140	250	180

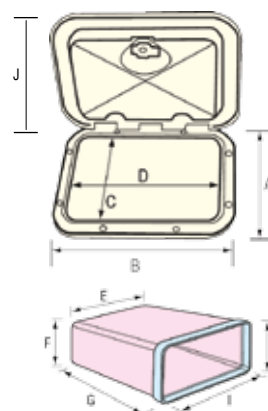

Storage Hatches for VHF/General Use
with cromed handle
ASA, UV resistant

Code	Model	Colour	Optional Spare Parts	
			Lock	Gasket
195548	Standard	White		
195555	With lock			
			44810	44554 (1,7m)

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
174	292	242	116	236	124





Nuova Rade

Marine - Plastics Technology Experts

Tanks



Nuova Rade

Marine - Plastics Technology Experts

EASY WASHABLE

VARIOUS USES

“DIABLO”

SMART TANK

Nuova Rade's new line of fixed tanks is designed in recyclable HDPE material. The line consists of a full range of 10 models complying with international standards and can be used for both fuels such as gasoline, diesel, ethanol, alternative fuels and organic vegetable oils, drinking water and wastewater collection.

The innovation of the “Diablo” tanks, is represented by the ‘EASY SWITCH’ hatch, red for gasoline, brown for black water and blue for fresh water, which is manually interchangeable.

The overall advantage will be to buy separately the tanks from the hatch to optimize the level of stock and range availability.

The hatch is secured and sealed by rotation of the piece itself and is blocked into position by means of a locking pin that prevents loosening. To clean the tank just lift the locking pin and remove the hatch by unscrewing it.

Use for:



Fuel



Drink Water



Waste Water





Rina
Approved



**Fixed Tank with
EASY-SWITCH**

Fixed Tanks

Diablo



Code	197477	197478	197479	197480	197481	197482	197483	197484	197485	197486
Capacity (lt)	37	48	60	70	82	49	64	78	93	108
Length (mm)	500	650	800	950	1100	500	650	800	950	1100
Width (mm)	360	360	360	360	360	360	360	360	360	360
Height (mm)	230	230	230	230	230	305	305	305	305	305

Easy Switch Plates



197487
Easy switch
fuel



197488
Easy switch
fresh water



197489
Easy switch
waste water h230



197491
Easy switch
waste water h305



197490
Easy switch
blind

Fittings

197492 Connector 90°, 38mm, 1½" thread		•	•	••	••	—
197493 Cap 1½" thread		•	—	—	—	—
197494 Cap 3/4" thread		••	—	—	—	—
197495 Connector 90°, Ø17mm, 3/4" thread		•	•	—	—	—
197496 Cap 1/2" thread		•	—	—	—	—
197497 Connector 90°, Ø11mm, 1/2" thread		•	—	—	—	—
197498 Connector 90°, Ø13mm, 3/4" thread		—	•	—	—	—
197499 Connector 90°, Ø25mm, 1½" thread		—	—	••	••	—
197500 Set Connectors 90°, Ø25mm & Ø20mm, 1" thread		—	—	•	•	—
197501 Internal Gasket d.235 x 17,5mm		•	•	•	•	•

Optional Sensor-Sender Match



h=230mm

197347

197347

197365

—



h=305mm

197349

197349

196911



0-190 Ohm



240-33 Ohm

Installation



43897
Bracket for Battery Box/Fuel
Tank, with Strap 1,50m

*For better stability of the tank
use 2 pcs*

Gauges



197341 - 197342



197343 - 197344



197345 - 197346

Fixed Tanks

Ercole



Fuel Tank

Fresh Water Tank

Thread Ø 50mm

197341
197342

197343
197344

CE

Use	Code	Type	Capacity (lt)	Length (mm)	Width (mm)	Height (mm)	Connector Pipe Ø (mm)	Deck Filler	Sensor (optional)		
Fresh Water Tanks (White)	44798	With filler cap	45	500	350	300	16	Thread Ø 50mm	197348 0-190 Ohm		
	44800		56	650				Straight Ø 38mm			
	44802		70	800							
	50193	Without cap	45	500	350	300		45° Ø 38mm			
	50197		56	650							
	50203		70	800							
	50194	Without cap	45	500	350	300		45° Ø 38mm			
	50198		56	650							
	50204		70	800							
Fuel Tanks (Black)	44797	With filler cap	41	500	350	300	8	Thread Ø 50mm	197348 0-190 Ohm		
	44799		55	650				Straight Ø 38mm			
	44801		69	800							
	50195	Without cap	41	500	350	300		Straight Ø 38mm			
	50199		55	650							
	50205		69	800							
	50196	Without cap	41	500	350	300		45° Ø 38mm			
	35008		55	650							
	50206		69	800							

Sogliola



Fuel Tank

Fresh Water Tank

Thread Ø 50mm

197341
197342

197343
197344

CE

Use	Code	Type	Capacity (lt)	Length (mm)	Width (mm)	Height (mm)	Connector Pipe Ø (mm)	Deck Filler	Sensor (optional)		
Fresh Water Tanks (White)	44833	With filler cap	45	650	350	220	16	Thread Ø 50mm	197347 0-190 Ohm		
	44835		60	850				Straight Ø 38mm			
	44837		80	1100							
	50207	Without cap	45	650	350	220		45° Ø 38mm			
	50212		60	850							
	50216		80	1100							
	50208	Without cap	45	650	350	220		45° Ø 38mm			
	50213		60	850							
	50217		80	1100							
Fuel Tanks (Black)	44832	With filler cap	38	650	350	220	8	Thread Ø 50mm	197347 0-190 Ohm		
	44834		49	850				Straight Ø 38mm			
	44836		73	1100							
	50209	Without cap	38	650	350	220		Straight Ø 38mm			
	50214		49	850							
	50218		73	1100							
	35009	Without cap	38	650	350	220		45° Ø 38mm			
	50215		49	850							
	50219		73	1100							

Fixed Tanks

Bora



197343
197344






Horizontal model made from PE HD.
Available in 4 sizes: 40L, 60L, 80L, 100L and
2 versions :

- Holding base tank alone.
 - Complete set including a holding tank, an autoclave pump (12V) and fittings.
- Accessories available : pump, sensor, vented loop, valve, filter, deck filler.

Use	Code	Type	Capacity (lt)	Length (mm)	Width (mm)	Height (mm)	H1 (mm)	SL (mm)	SW (mm)	SH (mm)	Ø A (mm)	α Angle	Pump	Sensor (Optional)	
Fresh Water	196887	Base Tank	40	545	400	270	-	350	200	80	133,5	120 ⁰	*		
	196888		60	775	400	270	-	350	200	80	133,5	120 ⁰	*		
	196889		80	1005	400	270	-	350	200	80	133,5	120 ⁰	*		
	196890		100	1245	400	270	-	350	200	80	133,5	120 ⁰	*		
	196895	Tank with Pump	40	545	400	270	300	350	200	80	133,5	120 ⁰		56082 (12 V, 8lt/min)	197348 0-190 Ohm
	196896		60	775	400	270	300	350	200	80	133,5	120 ⁰			
	196897		80	1005	400	270	300	350	200	80	133,5	120 ⁰			
	196898		100	1245	400	270	300	350	200	80	133,5	120 ⁰			
	197062		60	775	400	270	280	350	200	80	133,5	120 ⁰		53432 (12 V, 12,5lt/min)	
	197063		80	1005	400	270	280	350	200	80	133,5	120 ⁰			
	197064		100	1245	400	270	280	350	200	80	133,5	120 ⁰			

*Optional Pump 56082 (12V, 8 lt/min)

Installation example

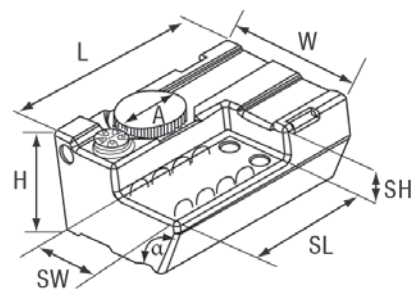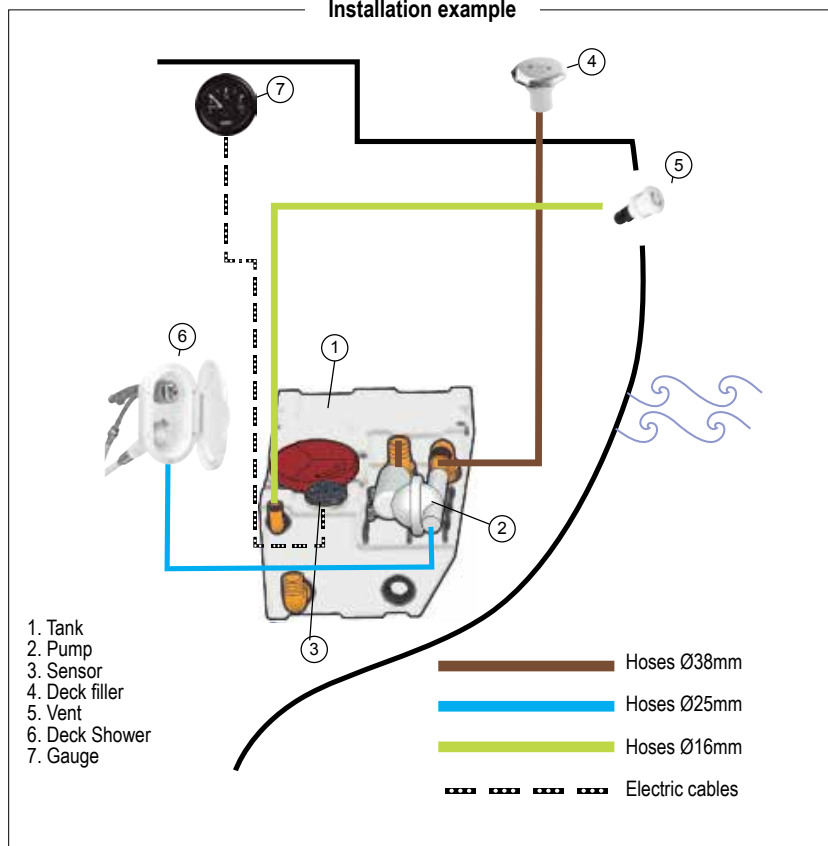

Fixed Tanks

Blizzard



197345
197346



Horizontal model made from odour-free PE HD.

Available in 4 sizes: 40L, 60L, 80L, 100L and



2 versions :

- Holding base tank alone.

- Complete set including a holding tank, a diaphragm pump (12V or 24V), a sensor, and fittings.




Accessories available : pump, sensor, vented loop, valve, filter, deck filler.

EC ISO 8099

Use	Code	Type	Capacity (lt)	Length (mm)	Width (mm)	Height (mm)	H1 (mm)	SL (mm)	SW (mm)	SH (mm)	Ø A (mm)	α Angle	Pump	Sensor
Waste Water	196867	Base Tank	40	545	400	270	-	350	200	80	133,5	120 ⁰	*	**
	196868		60	775	400	270	-	350	200	80	133,5	120 ⁰	*	**
	196869		80	1005	400	270	-	350	200	80	133,5	120 ⁰	*	**
	196870		100	1245	400	270	-	350	200	80	133,5	120 ⁰	*	**
	196871	Tank with Pump and sensor	40	545	400	270	320	350	200	80	133,5	120 ⁰		
	196872		60	775	400	270	320	350	200	80	133,5	120 ⁰		
	196873		80	1005	400	270	320	350	200	80	133,5	120 ⁰		
	196874		100	1245	400	270	320	350	200	80	133,5	120 ⁰		
	196875		40	545	400	270	320	350	200	80	133,5	120 ⁰		
	196876		60	775	400	270	320	350	200	80	133,5	120 ⁰		
	196877		80	1005	400	270	320	350	200	80	133,5	120 ⁰		
	196878		100	1245	400	270	320	350	200	80	133,5	120 ⁰		

*Optional Pump 196862 (12V, 19 lt/min) or 196861 (24V, 19 lt/min) ** Optional Sensor 196911

Installation example

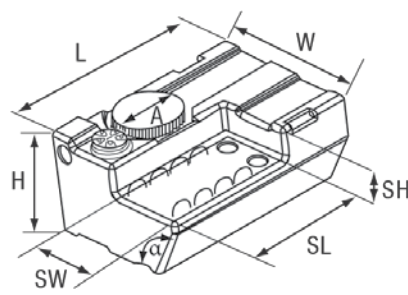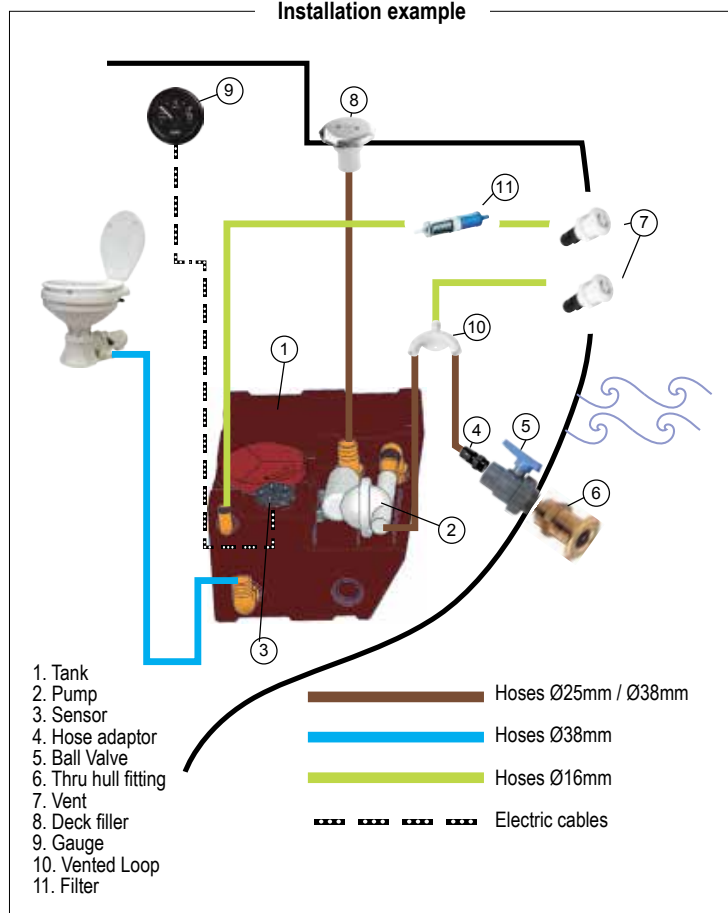


Fixed Tanks

Zefiro

Vertical model made from odour-free high-density polyethylene (HDPE).
Gravity discharge : when installation is carried out at more than 0.5 m above the waterline, the tank can be emptied without pump. Can be mounted on a bulkhead.

- Accessories available : sensor, gauge, vented loop, valve, filter, deck filler, pump.
- Shaped for an effective discharge
 - 1 inlet and 2 outlets Ø 38 mm - G 1 1/2"
 - 1 vent Ø 25 mm - G 3/4"
 - 1 inspection hatch: Ø 127 mm
 - Plate compatible with VDO standard sensors
 - Compatible with diaphragm pumps and macerators (12 or 24V)



197345
197346




EC ISO 8099

Use	Code	Capacity (lt)	L1 (mm)	L2 (mm)	W (mm)	H (mm)	H1 (mm)	Ø A (mm)	Sensor (Optional)
Waste Water Tank	196881	40	400	302	250	493,7	540	133,5	196909
	196882	60	400	302	250	703,7	750,3	133,5	196910

240-33 Ohm

Installation example

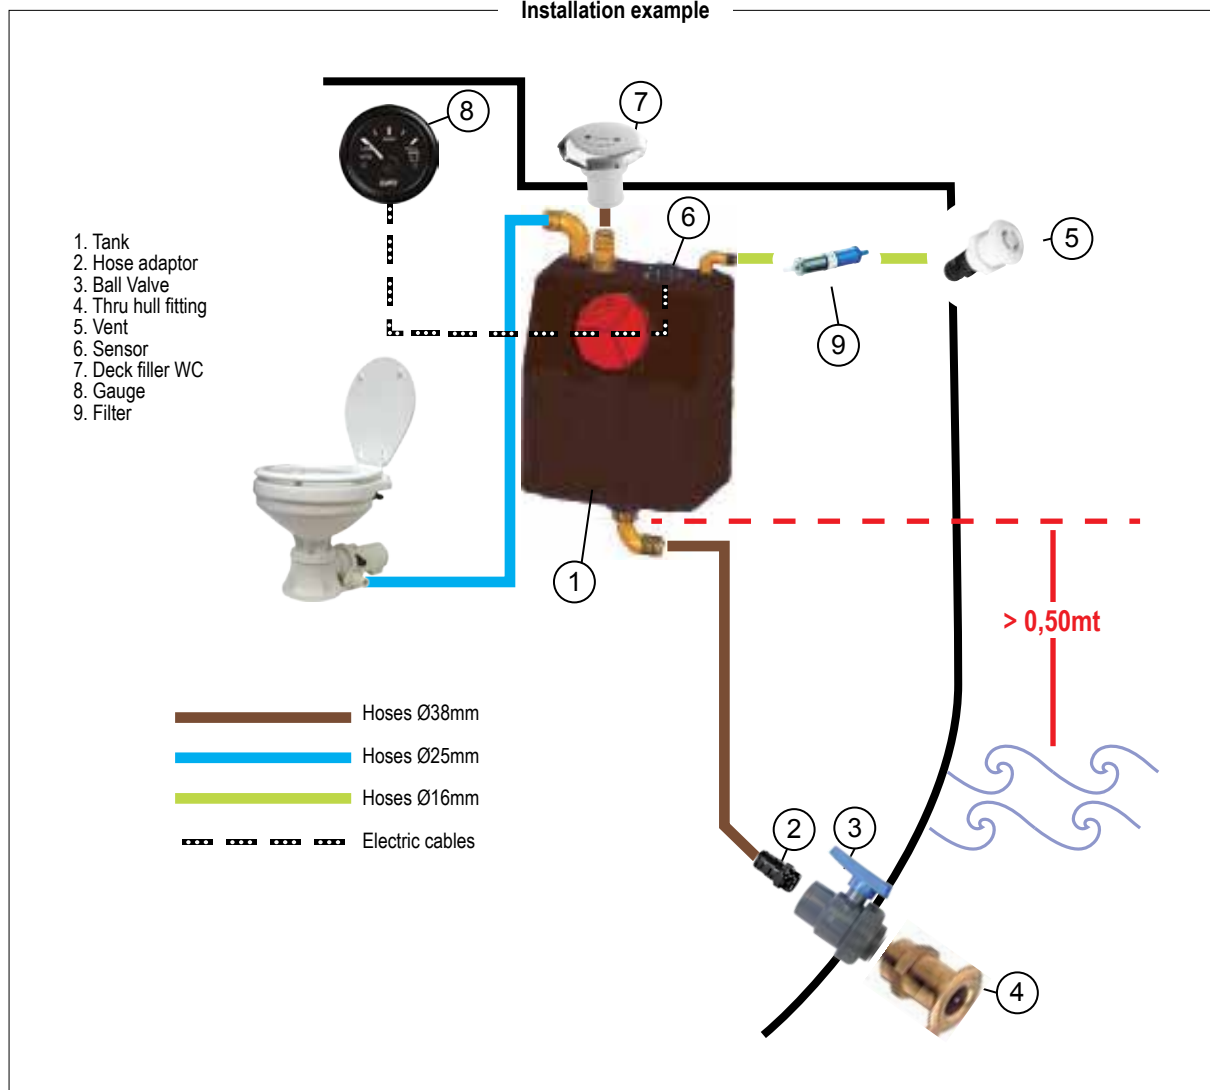

Fixed Tanks

Mistral

High-density polyethylene (HDPE) offering high chemical, mechanical and fire resistance. Tanks feature: one central column for increased rigidity of the tank and easy securing to the boat, lateral baffles to reduce fuel tossing.

Come with integrated sensor including:

- nozzles (flue / diesel)
- 1 vent, ext. Ø 16-18mm




197341
197342



Use	Code	Capacity (lt)	Length (mm)	Width (mm)	Height (mm)	Connectors				Sender
						Ø A (mm)	Ø B (mm)	Ø C (mm)	Ø D (mm)	
Fuel Tank	196251	55	900	245	400	16	38	38	50	 197070 0-190 Ohm

*For diesel tank use sender 197073



Water Tanks



Use	Code	Capacity (lt)	Length (mm)	Width (mm)	Height (mm)
Fresh Water Tank	45361	48	400	480	250
	45362	59	680	460	190
	45363	72	680	460	230
	45364	84	700	400	300
	45365	85	880	480	200
	45366	80	650	450	280
	45367	150	1200	450	280




Use	Code	Capacity (lt)	Length (mm)	Width (mm)	Height (mm)
Fresh Water Tank	45359	130	550	400	140
	45360	70	580	580	200

Flexible Tanks




NEW



Flexible Water Tanks, grey

Flexible water tanks solve the problem of storing water on your boat. Made of non-toxic PVC, they are suitable even for drinking water. The tanks are supplied with a valve, which can be used for ventilation and with two extra fittings (cut through hole: 48mm). They are easy to store and use. Lalizas flexible water tanks are available in rectangular and triangular models.

Use	Code	Capacity (lt)	A (mm)	B (mm)	C (mm)	Outlet Fitting	Inlet Fitting	Valve
Water Tank (Triangular)	31325	55	860	930	210			
	31326	100	1080	1080	210			
Water Tank (Rectan- gular)	31321	55	600	740	-			
	31322	75	840	740				
	31323	100	1000	740				
	31324	120	1250	740				
	31329	150	1500	740				
	31327	200	1700	740				
						31352	31351	02022



Portable Tanks

Hulk




RINA
TYPE APPROVAL
N.DIP. 342507CS/001

HULK Portable Tank Fuel

- HDPE
- Ø 8mm outlet with filter
- With vented filler cap
- With level gauge (only for 44804 & 44805)

Use	Code	Capacity (lt)	Length (mm)	Width (mm)	Height (mm)	Fuel Gauge
Portable Fuel Tank	44803	12	410	260	195	No
	44804	22	460	305	265	Yes
	44805	30	510	360	270	Yes



Ø 8mm outlet with filter

Jerrycans



JERRYCAN Portable Fuel Tank with Spout

Very stable and easy to grip. Top handle and bottom design make it easy to carry and facilitate pouring. Increased stability due to large base dimensions.

- HDPE
- Features a vent filler cap
- Supplied with spout

Use	Code	Capacity (lt)	Length (mm)	Width (mm)	Height (mm)
Portable Fuel Tank	43604	5	300	240	185
	43598	10	300	240	250
	43600	15	300	240	330
	43602	22	300	245	440

Fuel Tanks

CE/N. DIP. 64496/4
CE/N. DIP. 64496/5




Fuel Portable Tank with Filter

- HDPE
- Ø 8mm outlet with filter
- With vented filler cap

Use	Code	Capacity (lt)	Length (mm)	Width (mm)	Height (mm)	Fuel Gauge
Portable Fuel Tank	44790	10	330	245	135	No
	44789*	25	440	295	210	Yes

*Suitable for diesel by adding 44624 (Pipe fuel return)



Ø 8mm outlet with filter

Fixed Tanks Accessories




Ercole - Sogliola

Code	Description
45284	A Tank Filler Cap
44467	C Fuel Pick-up Tube w/Pipe Conn. Ø8mm
50140	D Water Pick-Up Tube, w/ Ø16mm Conn.
44088	FGHE Set Connectors w/Ø50mm Straight
44089	FGHI Set Connectors, w/Ø38mm Straight
43366	E Straight Connector Ø50mm
43368	I Straight Connector Ø38mm

Code	Description
44090	FGHM Set Connectors, w/Ø50mm 90° Elbow
44091	FGHN Set Connectors, w/Ø38mm 90° Elbow
43370	M Elbow Connector 90°, Ø50mm
43374	N Elbow Connector 90°, Ø38mm
44624	F Elbow Conn. 90°, Pipe f/Fuel Return
44569	P Vent. Elbow Conn. 90°, Hose Ø16mm
44838	Q Universal Bracket w/Holding Straps

Blizzard - Bora - Zefiro

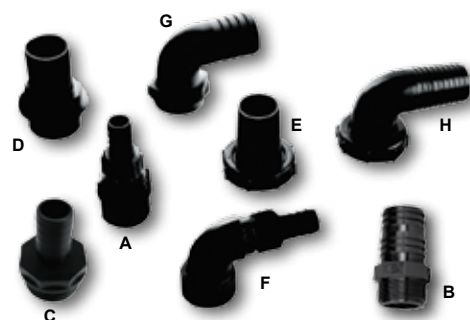

Connectors

	Code	Description	Model	Ø (mm)
A	196906	Straight	G ¾"	16
	196904		G ¾"	20
	196915		G ¾"	25
B	196914	Straight	G 1 ¼"	25
	196913		G 1 ¼"	38
	196925		G 1 ½"	25
C	196917	Straight	G 1 ½"	38
	196902		G 1 ½"	38
F	196905	90°	G ¾"	20
	196916		G ¾"	25
	196918		G 1 ½"	38
H	196901	90°	G 1 ½"	38



196791
3-way diverter valve



51732
Odour-free filter
for hose Ø 16 - 19 mm.







Deck fill Inox
for 38mm (1-1/2") hose

Code	99770	99772
For use	Gas	Water

Ventilators for Tank

Code	Description	Colour	Ø A (mm)	Hose Ø B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
37331	Straight	White	29	16	83	41	40	-
31515	Elbow 90°	White	29	16	83	41	40	50
37330	Straight	White	29	16	83	60x40	40	-
31517	Elbow 90°	White	29	16	83	60x40	40	50




* Cream colour available upon request.

Fixed Tanks Accessories

Deck Filler, Glass Reinforced PA

Construction in 2 materials to combine sturdiness, lightweight and stylish design:

- Deck filler's body in glass re-inforced nylon.
- Cap in 316 L stainless steel
- Open with dual imprint key or manually thanks to finger-grip cap

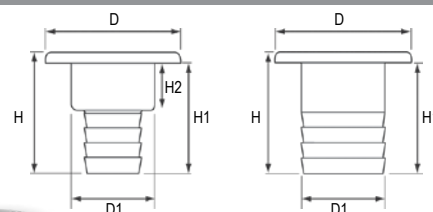

Code	Model	Hose diam. (mm/inch)	H (mm)	H1 (mm)	H2 (mm)	diam. D (mm)	diam. D1 (mm)
197206	Water	38 / 1 1/2"	75	66	23	92	50
197203	Fuel	51 / 2"			-		
197205	Diesel						


Deck fillers for gas, diesel, water & waste

The Deck Filler range includes deck fillers suitable for water, fuel and waste. They are designed in such a way that the full lid area is totally covered, which makes the final look much more attractive. Each deck filler could have a different function, which will always be clear - by using the relevant sticker (water, fuel, waste) included in each fill's packing. They are made of highly resistant plastic and are available in 38mm and 50mm diameter.




Deck Filler with Cap

Code	Tube Diameter (mm)
99567	38 (1-1/2")
99568	50 (2")



Deck Filler with Chrome Plated Cap

Code	Tube Diameter (mm)
70594	38 (1-1/2")
70595	50 (2")

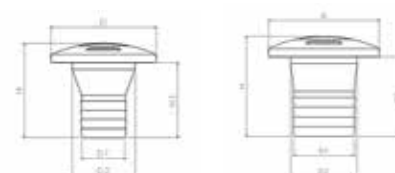

38 (1-1/2")


50 (2")

Hose diam. D1 (mm/inch)	H (mm)	H1 (mm)	diam. D (mm)	Cut out D2 (mm)
38 (1-1/2")	84	66	92	55
50 (2")				

Plastic Deck Fillers, Flip Top

Code	Model	Hose Ø (mm)
196275	Water	38 (1 1/2")
196265	Fuel	38 (1 1/2")
196266		51 (2")
196267	Diesel	38 (1 1/2")
196268		51 (2")


	A (mm)	Ø B (mm)	Ø C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Ø N (mm)	K (mm)	J (mm)
Ø 38	80x93	55	48	33	26	72	46	38	84	98
Ø 51	80x93	55	48	33	26	72	46	50	84	98



Plastic Deck Fillers

Code	Model	Hose Ø (mm)	Colour
45298	Water	38 (1 1/2")	White
47618			Cream
35011	Fuel	38 (1 1/2")	White
50311			Cream
45282		51 (2")	White
45283			Black

	A (mm)	Ø B (mm)	Ø C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Ø N (mm)
Ø 38	85	55	48	33	26	72	46	38
Ø 51	85	55	48	33	26	72	46	50



195015
Spare Deck Filler Cap
with Chain for Fuel



195016
Spare Deck Filler Cap
with Chain for Water

Sensors & Gauges

NEW

Sensor for Fuel & Water Tanks

(12/24V, St. Steel 316, SAE5)

Code	Use Type	Height (mm)	Impedance (Ohm)	Suitable for
197347	Fuel & Water	150	0 - 190	Sogliola - Diabolo H230mm
197348		200		Ercole - Bora
197349		250		Diabolo H305mm
197350		300		For custom made tank
197351		350		
197352		400		
197353		450		
197354		500		
197355		600		
197356		150	240 - 33	Sogliola - Diabolo H230mm
197357		200		Ercole - Bora
197358		250		Diabolo H305mm
197359		300		For custom made tank
197360		350		
197361		400		
197362		450		
197363		500		
197364		600		



Sender for Fuel or Diesel Tanks

(12/24V, St. Steel 316, SAE6)

Code	Use Type	Height (mm)	Impedance (Ohm)	Suitable for
197070	Fuel	195	0 - 190	Mistral
197077		233		
197180		272		For custom made tank
197068		293		
197066		315		
197067		330		
197073	Diesel	195	0 - 190	For custom made tank
197075		233		
197076		293		

NEW

Sensor for Waste Tanks

(12/24V, St. Steel 316, SAE5)

Code	Use Type	Height (mm)	Impedance (Ohm)	Suitable for
197365	Waste Water	150	240 - 33	Diabolo
196911		233		Blizzard - Diabolo
197367		350		For custom made tank
196909		480		Zefiro 40lt
196910		690		Zefiro 60lt



Gauge for sensors

12/24V, Ø52mm, Black

NEW

Code	Use Type	Impedance (Ohm)
197341	Fuel	0 - 190
197342		240 - 33
197343	Water	0 - 190
197344		240 - 33
197345	Waste	0 - 190
197346		240 - 33



Portable Tanks Accessories




43901

Universal base with strap
280x178mm



43895

Strap for Fixing Fuel Tank - Battery Box, Length 1.30 m
It includes hasps and plastic buckles for the strap




43897

Bracket for Battery Box/Fuel Tank,
with Strap 1,50m



Connector for Tank Vent

Code	Hose Diameter (mm)
44567	16
44568	20



44179

Handle for Portable Fuel Tank,
L.310mm, Black



44469

Pick-up Tube w/Filter
& Pipe Connector Ø1/4"



45301

Filler Cap with Vent for Portable
Fuel Tanks



45415

Spout for Jerrycans



Connector for Line Ø8mm, Plastic

Code	Description
43451	1/4"



31351

Thru-Hull w/Fl. Flange, 1 1/2",
for Ø42mm Hose, Black



31352

Thru-Hull Outlet Ø48mm
for 5/8" Hose, Black



02022

Valve for Flexible Water Tanks



Nuova Rade

Marine - Plastics Technology Experts

Engine

Fuel line Accessories



Fuel Primer Bulb with Ø8mm Hose

Code	Material	Diameter (mm)	Hose Length (m)	Bulb Code
45386	PVC	39	2	44476
31958		45		31957



Fuel Primer Bulb with Hose Ø8mm

Code	Material	Diameter (mm)	Hose Length (m)	Filter	Bulb Code
45387	Rubber	45	2	No	31957
45388			3	Yes	



Fuel Primer Bulb

Code	Diameter (mm)	Length (mm)	Hose Diameter (mm)
44476	39	130	8
31957	45	150	




Fuel hose Length 50m

Code	Material	Internal diameter (mm)	External diameter (mm)
37338	Polyurethane	7	12
37339	PVC	7	13
39311	Polyurethane	10	16



Plastic Ties
Hydrocarbon Resistant

Code	Colour	Length (mm)	Width (mm)	Max Diameter (mm)
43816	Black	120	4	28
43824		200	5	51
43830		360	5	112
43815	White	120	4	28
43822		200	5	51
43829		360	5	112

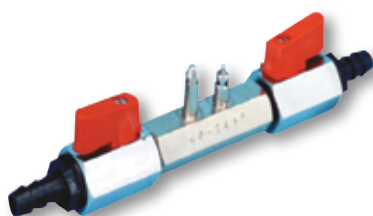


Fuel Valve 2-way, Hose Ø10mm

Code	For engines
43707	OMC - JOHNSON - EVINRUDE.
43708	YAMAHA - MARINER - MERCURY - HONDA.




44631
Fuel Valve Shut-off for
Hose Ø8mm



45186
Fuel Valve
Holding Bracket (Pair)

Suzuki / Chrysler



31950
Fuel Line Tank Female
connector with Ø8mm barb >60
CV, chromed brass



31943
Fuel Line Tank Female
connector with Ø8mm barb,
chromed brass



31946
Fuel Line Tank Male
connector with 1/4" NPT
>60 CV, chromed brass

Fuel line Accessories

Mercury 1998 > / Mariner



43308
Fuel Line Tank Male
connector with Ø9,5mm barb



31951
Fuel Line Tank Female
connector with Ø9,5mm barb



43314
Fuel Line Tank Male
connector with Ø8,5mm barb



31942
Fuel Line Tank Female
connector with Ø9,5mm barb



43324
Fuel Line Tank Male connector
with Ø10mm barb, double



43322
Tank Male connector
with 1/4" NPT barb



Yamaha



43314
Fuel Line Tank Male
connector with Ø8,5mm barb



31942
Fuel Line Tank Female
connector with Ø9,5mm barb



43324
Fuel Line Tank Male connector
with Ø10mm barb, double



43322
Tank Male connector
with 1/4" NPT barb



OMC / Johnson / Evinrude



31941
Fuel Line Tank Female
connector with Ø9,5mm barb



43333
Fuel Line Tank Male connector
with Ø10mm barb, double



43331
Tank Male connector
with 1/4" NPT barb



43329
Fuel Line Tank Male
connector with Ø6,5mm barb



Honda



43301
Fuel Line Tank Female
connector with 9,5mm barb



Tohatsu / Selva




31956
Fuel Line Tank Male
connector with Ø8mm barb



31952
Fuel Line Tank Female
connector with Ø8mm barb

Battery Boxes & Accessories




196508

Battery box up to 80Ah

Designed for small batteries. Complete with fastening strap and hasp.

External dimensions (L x W x H) : 340 x 230 x 250 mm
Internal dimensions (L x W x H) : 280 x 195 x 230 mm



195539

Battery box up to 100Ah

Acid resistant polypropylene. Comes with strap.

External dimensions (L x W x H) : 431 x 257 x 256 mm
Internal dimensions (L x W x H) : 339 x 199 x 224 mm



17518

Battery box up to 120Ah

Acid resistant polypropylene. Comes with strap and inside partition.

External dimensions (L x W x H) : 470 x 225 x 255 mm
Internal dimensions (L x W x H) : 385 x 175 x 225 mm



43901

Universal base with strap
280x178mm



43895

Strap for Fixing Fuel Tank - Battery Box, Length 1.30 m
It includes hasps and plastic buckles for the strap



43897

Bracket for Battery Box/Fuel Tank, with Strap 1,50m



43760

Protection covers
for battery terminals

Storage Bottles

Storage Bottles

To store safety equipment, medicine or personal belongings. Silicone gasket for optimum water resistance. Possibility to add a carrying rope.



Code	Capacity (lt)	Diameter (mm)	Height (mm)
39642	6	240	195
39643	8		260
39644	12		380
39645	15		440

Bailers & Funnels



26897

Oil Measurer

Diam. Ø58mm, Height 120mm



31354

Funnel Flexible
with Filter & Extension
Diam. Ø145mm




27480

Funnel with Filter
Diam. Ø180mm, Height 240mm



37350

Extension for Funnel 27480
Length 250mm

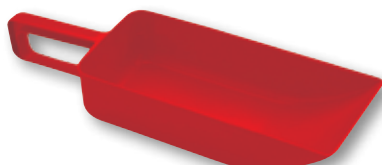

44676

Bailer Rigid, Red
365 x 110 mm (L x W)



44680

Bailer Rigid, White,
410 x 220 mm (L x W)



16207

Bailer Flexible, Floating, Petrol Blue,
190 x 135 mm (L x W)



44679

Bailer SVEZIA, Red,
320 x 160 mm (L x W)



44677

Bailer Funnel with Filter,
290 x 110 mm (L x W)



Outboard Engines Accessories

LZ-Hydrofoils

The LZ torque control system ensures the ultimate in precise and effortless steering.

The features that count:


- Lower fuel consumption
- Straight tracking
- Excellent steering at low speeds
- Smoother ride
- Maximum lift
- Reduced planing time
- Increased stability
- Reduced cavitation
- Effortless installation
- Stainless mounting hardware included



Code	For engines	A(mm)	B(mm)	C(mm)	D(mm)
10121	4HP to 50HP	185	180	5	23
10122	50HP and Over	270	240	7	30

- Secure mounting with bolts
- For use on outboard motors

NEW

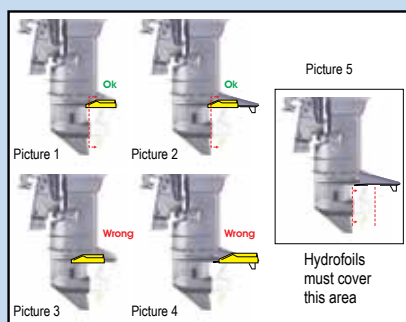


Use: Hydrofoils are specially designed wings which increase a motor's performance. They are available in two sizes, for 4HP to 50HP motors and for over 50HP. They are placed just above the propeller. By using the hydrofoils, fuel consumption is decreased, navigation is much smoother, stability is increased and at the same time offer a maximum lift, reducing cavitation. Hydrofoils also help the boat to easily trim.

Instructions of Use: Hydrofoils are fixed above the propeller on the cavitation plate and they are attached with stainless steel screws. The hydrofoils are fully adjustable for a smoother ride.

Mounting the hydrofoils on the outboard

The basic rule regarding the position of the hydrofoil is right above the propeller on the cavitation plate. The ideal position is for the hydrofoils to be mounted two centimetres before the propeller (see picture 1 and 2) and thus covering it completely (see picture 5). In this way, when the propeller starts to spin, most of the water will be pushed against the hydrofoil, thus maximising the steering and planing capabilities. If the hydrofoil is mounted too far ahead (see picture 3), then only a small amount of water will be pushed against it or if it is mounted too far at the back (see picture 4), then the maximum power of the water will be lost before the hydrofoil.

Replacement: These products do not need any maintenance. However, if you notice any cracks in one or both hydrofoils you should replace them. Also, if at any point you notice excess vibrations on the steering wheel or outboard motor, you should replace the hydrofoils immediately.

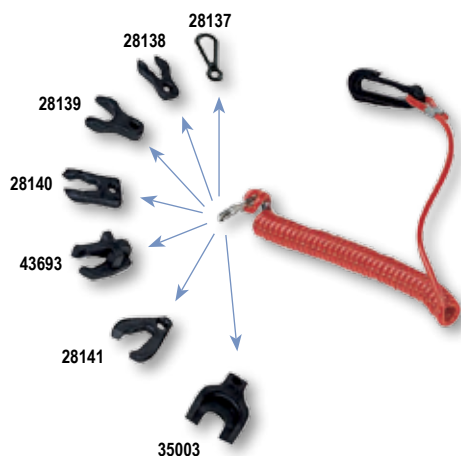

Set of Kill Switch Key with Coil Lanyard

Code	For Motors
28137	Mariner/ Mercury
28138	Mariner/ Suzuki / Johnson (4 strokes)
28139	Tohatsu
28140	Honda / OMC
43693	OMC / Johnson - Evinrude
28141	Yamaha
35003	OMC



98749
Outboard Engine Flusher, Oval



98748
Outboard Engine Flusher, Rectangular



47086
Outboard Engine Flusher, Double Intakes, Large
Length 280mm, Diam. Ø16mm

Tiller Extension for Outboard Engine

Code	Length (cm)
27117	65
27118	100
27119	80-111 Telescopic





Nuova Rade

Marine - Plastics Technology Experts

Plumbing & Ventilation



Deck Shower




Case with Cold Water Tap & Outlet, with Lid, White

Includes :

- Sea water outlet with quick female connector.
- Cold water tap + "T" connector.
- St. steel threaded hose.


Code	Connector	Cover Colour
54607	Straight	White
54609	Elbow	White
54610	Elbow	Chrome

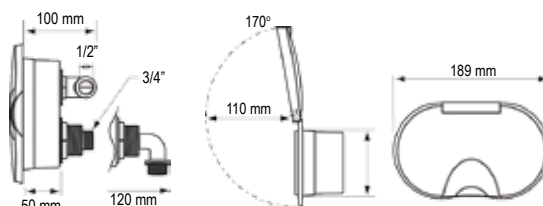

Case with Water Inlet/Outlet, with Lid


Sea water outlet/Fresh water inlet with quick connectors.

Code	Connector	Cover Colour
54611	Straight	White
54612	Straight	Chrome
54613	Elbow	White

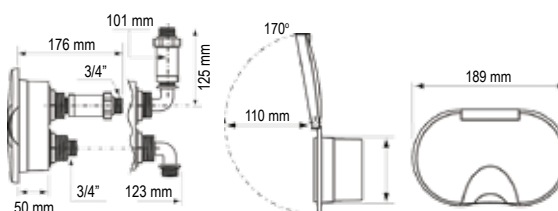

Case with Cold Water Tap, with Lid

Code	Colour Case
196393	White
196397	Cream



A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
95	75	9	55	95




Case with Mixer Tap, with Lid

Code	Colour Case
196392	White
196396	Cream



Case with mixer tap

Code	Water Tap	Connector	Cover Colour
46206	Mixer	20 cm 3-hose connectors	Chrome
47676	Mixer	20 cm 3-hose connectors	White

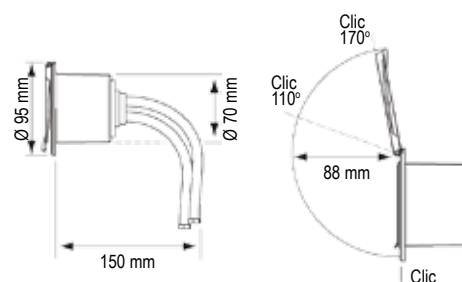

Case Twin For Shower & Water Tap, with Lid

Code	Cover Colour
55800	White
196686	Cream
55801	Chrome



Mixer Water Tap (Cold/Hot)

Code	Connector	Colour
45601	20 cm 3-hose connectors	Chrome

Deck Shower

Case with Fresh Water Inlet with Lid

Nuova Rade fresh water inlet is the perfect connection between the boat's water network and the shore water supply. It is then easy to cook or have a shower when at the dock, without using water from the tanks. (Not suitable for filling the water tanks).



The complete set (47812-5) includes :

- An ABS housing with splashproof cover
- A pressure regulator which accepts up to 5 bar working pressure, compatible with most appliances and equipment on board.
- A non-return valve
- A male quick-coupling fitting for garden hose connection
- Male 3/4" threaded connector to the boat's water system

The complete set (58131) includes :

- An ABS housing with splashproof cover
- A male quick-coupling fitting for garden hose connection
- Male 3/4" threaded connector to the boat's water system
- Metal Pressure regulator with cloth diaphragm valve, adjustable from 1,5 to 5 bar.
- Maintenance free, robust construction with silent operation (no vibration).
- Max. inlet pressure: 15 bar.
- Max. temperature: 70°C
- Corrosion preventing DZR brass body.
- Factory preset (4 bar at zero discharge for 3 bar working).
- Diaphragm and seals EPDM & NBR.
- Slotted adjusting screw that can be turned with a flathead screwdriver
- Female 1/4" pressure gauge outlet

Code	Connector	Cover Colour	Pressure Regulator
47812	Straight	White	Plastic up to 5 Bar
47813	Elbow		
47814	Straight	Chrome	
47815	Elbow		
58131	Elbow	White	DZR brass up to 15 Bar

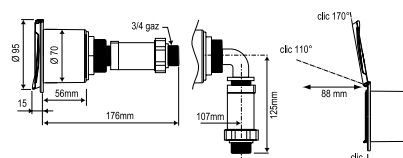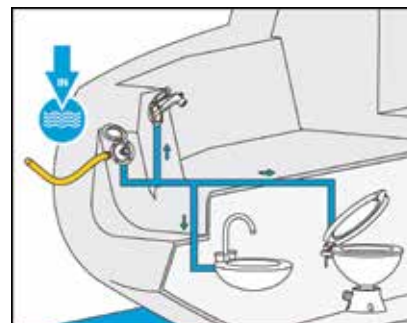



Case with Sea Water Outlet with Lid

Used in conjunction with a pump and thru-hull fitting, the sea water outlet produces pressure sea water on the deck (to wash the deck or rinse the fish). Also perfectly suitable with fresh water.

The complete set includes :



- An ABS housing with splashproof ASA cover
- A female quick-coupling fitting for garden hose connection. Features a non-return valve
- Chrome brass construction with stainless steel lugs, for optimum corrosion resistance
- A locking flange
- Male 3/4" threaded connector to the boat's water system

Code	Terminal	Cover Colour
47816	Straight	White
47817	Elbow	
47818	Straight	Chrome
47819	Elbow	

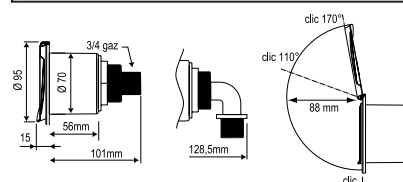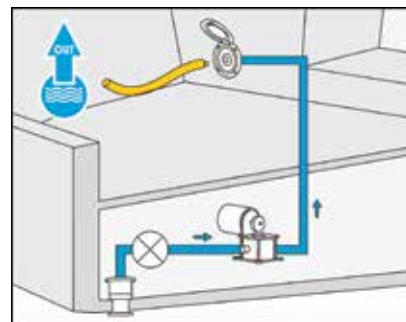


Case for water tap with lid, Round

Code	Cover Colour
42576	White
46171	Chrome



Case for water tap with lid, square, white

Code	Colour Case
196391	White
196395	Cream



A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
95	75	9	55	95

Deck Shower

Case with shower, water tap and lid

Specifically designed to combine two functions in one single housing, they allow major room saving and easy access. In addition to their simplified installation process, they have been engineered to combine optimum comfort, durability and absolute safety.


Available with white or chrome cover, the housing fits in any deck or transom to give the boat a clean uncluttered look and can be mounted vertically or horizontally. Supplied with drilling template.



54601



54604

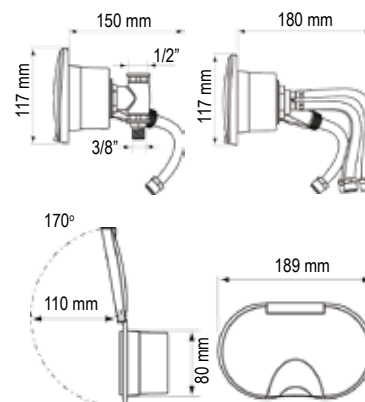


Code	Water Tap	Connector	Shower Head	Hose (m)	Cover Colour
54601	Cold	"T"	White	3	White
54604	Mixer	20cm 3-hose	White	3	White
54605	Mixer	20cm 3-hose	White	3	White
54606	Mixer	20cm 3-hose	Chrome	3	Chrome



Case with shower & mixer tap and lid with gasket

Code	Hose (m)	Colour
196409	3	White
196410	5	White
196411	3	Cream
196412	5	Cream

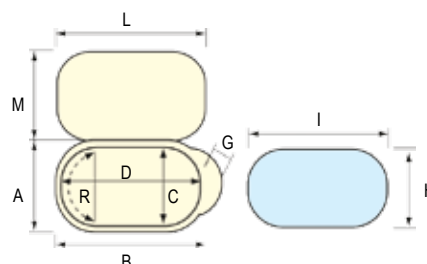


A (mm)	B (mm)	C (mm)	D (mm)	G (mm)	H (mm)	I (mm)	L (mm)	M (mm)	R (mm)
120	210	85	170	65	91	176	220	130	80



Case Side-mount, with Shower

Code	Water Tap	Lid	Hose (m)	Cover Colour
196469	Mixer	Yes	3	White
196470	Mixer	Yes	5	White
44297	No	No	3	White
44298	No	No	5	White
196421	No	Yes	3	White
196422	No	Yes	5	White
50015	No	No	5	Cream

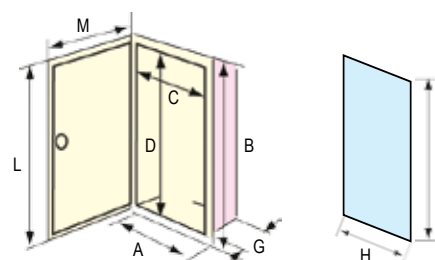


A (mm)	B (mm)	C (mm)	D (mm)	G (mm)	H (mm)	I (mm)	L (mm)	M (mm)
164	237	110	183	95	114	187	247	186

Deck Shower



Case with shower spray and lid

Code	Shower Head	Hose (m)	Cover Colour
46303	White	3	White
46304	Chrome	3	Chrome

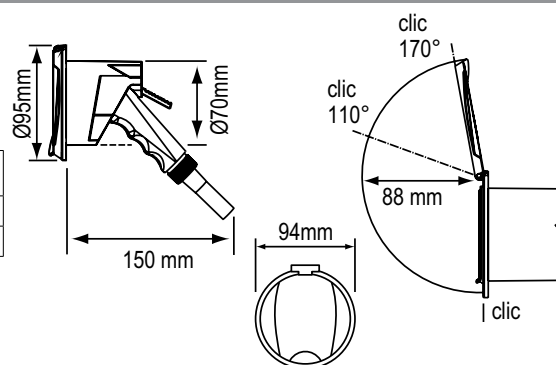

Shower head with hose
For flushmount installation on the deck or as transom shower.

Code	Hose (m)
55913	3
55914	5



Shower Hose Braid
1/2"-3/8"

Code	Hose (m)
45599	3
196086	5



Shower head, ABS, Short
1/2" threaded shower head with trigger.

Code	Colour
196481	Chrome
45598	White




Shower head, ABS, Long
1/2" threaded shower head with trigger.

Code	Colour
196480	Chrome
47083	White



Case for Shower Head, Round, with lid



Code	Cover Colour
42575	White
46170	Chrome

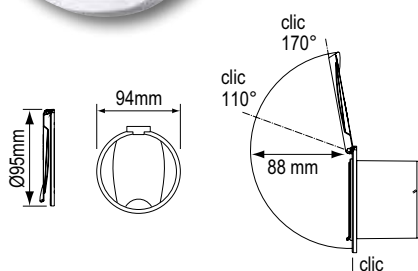

Case for Shower Head, Square, with lid

Code	Cover Colour
196399	White
196401	Cream

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
95	75	9	75	95




37214
Case for Shower Head,
Square, with Lid

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
125	87	30	97	90



35791
Case for Shower Head,
Round, with Lid



A (mm)	B (mm)	C (mm)	D (mm)
88	66	5	80


Deck Cases

Cases with Deck filler

Code	Use	Hose Ø (mm)	Colour	A (mm)	B (mm)	C (mm)	D (mm)	G (mm)	H (mm)	I (mm)
44306	Water	38	White	145	191	110	155	80	100	114
50023	Fuel									
50025	Diesel									
44305	Fuel	50	Cream	145	191	110	155	80	100	114
50024	Fuel	38								
47740	Fuel	50								


Cases with Deck filler with lid

Code	Use	Hose Ø (mm)	Colour	A (mm)	B (mm)	C (mm)	D (mm)	G (mm)	H (mm)	I (mm)	L (mm)	M (mm)
196419	Water	38	White	145	191	110	155	80	114	100	200	165
196417	Fuel											
196418	Diesel											
196415	Fuel	50	White	145	191	110	155	80	114	100	200	165

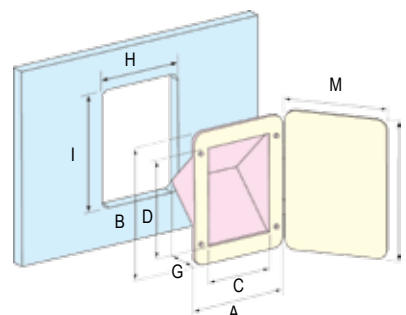

Cases for Deck filler

Code	Colour	A (mm)	B (mm)	C (mm)	D (mm)	G (mm)	H (mm)	I (mm)
44302	White	145	191	110	155	80	160	144
647442	Cream	145	191	110	155	80	160	144

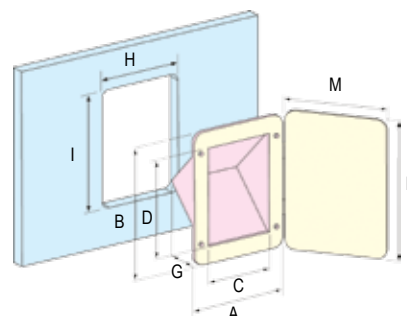


Cases for Deck filler with Lid

Code	Colour	A (mm)	B (mm)	C (mm)	D (mm)	G (mm)	H (mm)	I (mm)	L (mm)	M (mm)
196414	White	145	191	110	155	80	144	160	200	165


Cases for Shower

Code	Colour	A (mm)	B (mm)	C (mm)	D (mm)	G (mm)	H (mm)	I (mm)
44301	White	145	191	110	155	80	114	160



Cases for Shower with Lid

Code	Colour	A (mm)	B (mm)	C (mm)	D (mm)	G (mm)	H (mm)	I (mm)	L (mm)	M (mm)
196420	White	145	191	110	155	80	114	160	200	165
196471		165	237	110	183	95	114	187	247	186



✱ Special colours available upon request.

Pumps



Pump Diaphragm


Code	Model	Flow Rate	Length (mm)	Width (mm)	Height (mm)
196861	24V	19 L/min	300	160	130
196862	12V				



NEW

Waste Pump with Macerator

Code	Model	Flow Rate	Length (mm)	Width (mm)	Height (mm)
94562	12V	50 L/min	210	110	120
94563	24V		210	108	98

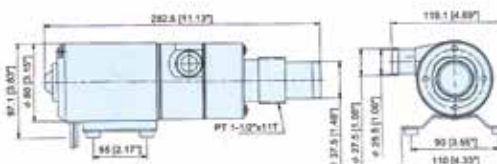

56082



53432

NEW


Water Pump

Code	Model	Flow Rate	Length (mm)	Width (mm)	Height (mm)
56082	12V	8 L/min	210	110	120
53432		12,5 L/min	210	108	98




Hose Pump, Manual Suction, lenght 160cm, White

Code	Diameter (mm)
70002	12,5
70003	25




1. Place the bottom end A of the hosepipe into the tank with the liquid that you wish to pump out and hold the top end B of the hosepipe upright



2. Shake the bottom end of the hose vigorously up and down until the liquid rises in the hose, continue pumping until the liquid passes balance level

ATTENTION: Make sure that the empty container is placed below the level of the container you wish to empty



3. Stop pumping and place top end of the hose in the container you wish to fill and the liquid will flow automatically


SUITABLE FOR PETROL - DIESEL - WATER

Thru-hulls

Thru-Hull with Flush Flange Threaded




Code	Colour	Thread Diameter Ø A (inch)*	Overall length C (mm)	Flush Flange Ø D (mm)	Thread Length E (mm)	Int. Ø F (mm)	Material	Optional plug
44737	White	1/2"	75	42,8	70	16	PA	-
14186	White	3/4"	77	44	70	19	PA	-
44740	White	3/4"	81	50,3	75,5	18	PA	-
44743	White	1"	93	62	86,4	24	PA	 45322
44746	White	1 1/2"	103	76	95,7	35	PA	 45307



Thru-Hull Easy Mount Threaded with Hose Barb




Code	Colour	Thread Diameter Ø A (inch)*	Hose Ø B (mm)	Overall length C (mm)	Flush Flange Ø D (mm)	Thread Length E (mm)	Material	Optional plug
23669	White	3/4"	20	45	35	15	PA	-
39473	White	7/8" (30mm)	25	80	53	39	PA	 45306
23671	White	1 1/4"	28/35	125	61	45	PA	-
16710	White	1 1/2"	38 or 1 1/4" seacock	121	70	50	PA	-



Thru-Hulls with Flush Flange and Hose Barb



Code	Colour	Thread Diameter Ø A (inch)*	Hose Ø B (mm)	Overall length C (mm)	Flush Flange Ø D (mm)	Thread Length E (mm)	Material	Optional plug
44696	White	5/8"	15	75	43	40	PA	-
44705	White	3/4"	18	80	51	43	PA	-
44714	White	1"	25	94	62	45	PA	 45322
44729	White	1 1/2"	32	102	76	55	PA	 45307
44735	White	1 1/2"	32	102	76	65	PA	
44723	White	1 1/2"	40	102	76	55	PA	



*According to BSP thread dimensions

Thru-hulls


Thru-Hulls with Flush Flange and Hose Barb

NEW



Code	Colour	Thread Diameter Ø A (inch)*	Hose Ø B (mm)	Overall length C (mm)	Flush Flange Ø D (mm)	Thread Length E (mm)	Material	Optional plug	Optional Non-Return Valve
10250	White	1"	19	81	45	36	PP		-
10251	White	1"	25	81	45	36	PP		
10252	White	1 1/2"	32	98	73	50	PP		
10253	White	1 1/2"	42	93	73	48	PP		
10256**	White	1 1/2"	32	93	73	50	PP	-	-
10257**	White	1 1/2"	42	93	73	48	PP	-	-

** with non return valve




NEW



Chrome plated with
plastic nut

Code	Colour	Thread Diameter Ø A (inch)*	Hose Ø B (mm)	Overall length C (mm)	Flush Flange Ø D (mm)	Thread Length E (mm)	Material	Optional plug	Optional Non-Return Valve
70597	Chrome	1"	19	82	45	36	PP		-
70598	Chrome	1"	25	82	45	36	PP		
70600	Chrome	1 1/2"	42	94	74	50	PP		
70603*	Chrome	1 1/2"	42	94	74	50	PP		


* with non return valve



NEW



Code	Colour	Thread Diameter Ø A (inch)*	Hose Ø B (mm)	Overall length C (mm)	Flush Flange Ø D (mm)	Thread Length E (mm)	Material	Optional plug	Optional Non-Return Valve
31351	Black	1 1/2"	42	94	73	50	PP		




*According to BSP thread dimensions

Thru-hulls

Thru-Hulls with Standard Flange Threaded



Code	Colour	Thread Diameter Ø A (inch)*	Overall length C (mm)	Flush Flange Ø D (mm)	Thread Length E (mm)	Int. Ø F (mm)	Material	Optional plug	Optional Valve	Optional Elbow
197211	White	1"	87	50	82	24	PA	-	-	-
196995	White	1 ½"	62	64	54	39	PA			
197003	White	1 ½"	92	64	84	40	PA			
197017	White	2"	117	72	110	48	PA			
197011	White	2"	72	72	65	48	PA			




Code	Colour	Thread Diameter Ø A (inch)*	Overall length C (mm)	Flush Flange Ø D (mm)	Thread Length E (mm)	Int. Ø F (mm)	Material	Optional plug	Optional Valve	Optional Elbow
197213	Inox 316	1"	87	50	82	24	PA	-	-	-
196999	Inox 316	1 ½"	62	64	54	39	PA			
197007	Inox 316	1 ½"	92	64	84	40	PA			
197014	Inox 316	2"	72	72	65	48	PA			
197020	Inox 316	2"	118	72	72	48	PA	-		

Thru-Hulls Threaded with Hose Barb



Code	Colour	Thread Diameter Ø A (inch)*	Hose Ø B (mm)	Overall length C (mm)	Flush Flange Ø D (mm)	Thread Length E (mm)	Material	Optional plug	Optional Valve
196997	White	1 ½"	38	87	64	56	PA		
197005	White	1 ½"	38	117	63	86	PA		
196998	White	1 ½"	45	86	63	58	PA		
197006	White	1 ½"	45	117	63	86	PA		
197012	White	2"	51	122	72	55	PA		
197018	White	2"	51	167	72	100	PA		
197013	White	2"	55	121	72	55	PA		
197019	White	2"	55	167	72	100	PA		
197218	Inox 316	3/4"	19	82	40	43	PA		-
197001	Inox 316	1 ½"	38	87	64	56	PA		
197002	Inox 316	1 ½"	45	87	64	56	PA		
197009	Inox 316	1 ½"	38	117	64	86	PA		
197010	Inox 316	1 ½"	45	117	64	85	PA		
197015	Inox 316	2"	51	122	72	56	PA		
197021	Inox 316	2"	51	167	72	100	PA		
197016	Inox 316	2"	55	122	72	55	PA		
197022	Inox 316	2"	55	167	72	100	PA		




*According to BSP thread dimensions

Thru-hulls

Thru-Hulls Threaded with Displaced Hose Bard




Code	Colour	Thread Diameter Ø A (inch)*	Hose Ø B (mm)	Overall length C (mm)	Flush Flange Ø D (mm)	Thread Length E (mm)	Material	Optional plug	Optional Valve
196996	White	1 1/2"	31	87	64	57	PA		
197004	White	1 1/2"	31	117	64	86	PA		
197000	Inox 316	1 1/2"	31	87	64	57	PA		
197008	Inox 316	1 1/2"	31	117	64	86	PA		



Thru-Hulls Threaded with Standard Flange



Code	Colour	Thread Diameter Ø A (inch)*	Overall length C (mm)	Flush Flange Ø D (mm)	Thread Length E (mm)	Int. Ø (F) (mm)	Material	Optional plug	Optional Non-Return Valve
195527	White	3/4" (25mm)	153	39	148	15	PA	-	-
43499	Black	7/8" (30mm)	155	39	150	22			
43497	White	7/8" (30mm)	155	39	150	22			
43498	Grey	7/8" (30mm)	155	39	150	22			
47756	Cream	7/8" (30mm)	155	39	150	22			
43491	Black	7/8" (30mm)	62	39	58	22			
43489	White	7/8" (30mm)	62	39	58	22			
47755	Cream	7/8" (30mm)	62	39	58	22			
43490	Grey	7/8" (30mm)	62	39	58	22			
43537*	Black	1" (33mm)	155	39	150	25			
43535*	White	1" (33mm)	155	39	150	25			
43536*	Grey	1" (33mm)	155	39	150	25			
43529*	Black	1" (33mm)	62	40	57	25			
43527*	White	1" (33mm)	62	40	58	25			
43528*	Grey	1" (33mm)	62	40	58	25			
47758*	Cream	1" (33mm)	62	40	58	25			
196073*	Black	1" (33mm)	76	42	70	25			
47122*	White	1" (33mm)	76	42	70	25		45322	45393

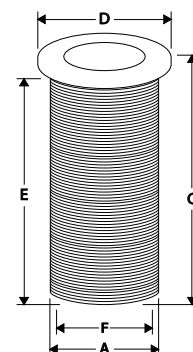

*Meets the EN ISO 11812:2001-7, 4 standard


Thru-Hull Kit

Complete set including :

- A 7/8" (30mm) thru-hull fitting with threaded end (43491).
- A black expanding plug (45306).
- An outlet with non-return valve (45391).



Code	Thread Diameter Ø A (inch)*	Hose Ø B (mm)	Overall length C (mm)	Flush Flange Ø D (mm)	Thread Length E (mm)
44092	7/8" (30mm)	22,7	62	39	58

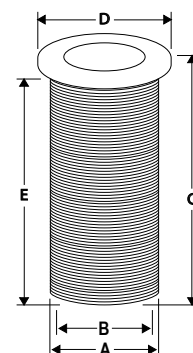

*According to BSP thread dimensions

Thru-hulls


Thru-Hulls Threaded with Standard Flange and Hose Barb



NEW

95793

Code	Colour	Thread Diameter Ø A (inch)*	Hose Ø B (mm)	Overall length C (mm)	Flush Flange Ø D (mm)	Thread Length E (mm)	Material	Optional plug
43508	White	7/8" (30mm)	25	100	40	70	PA	45306
43509	Grey	7/8" (30mm)	25	100	40	70		
47757	Cream	7/8" (30mm)	25	100	40	70		
43510	Black	7/8" (30mm)	25	100	40	70		
43543	White	1"	30	100	42	70		
43544	Grey	1"	30	100	42	70		
43545	Black	1"	30	100	42	70	PP	45322
95793	White	7/8" (30mm)	25	126	40	92		45306

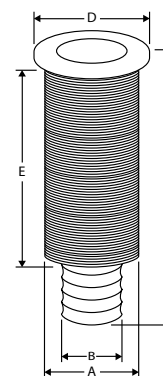

Thru-hulls Elbow 90°

NEW



With Chrome plated cap




Elbow thru-hulls are the answer to the most common plumbing issues:

- Allow major room saving, as they can be used with a hose running along the hull.
- Avoid making a bend in the hose, which can sometimes be a source of leak or breakage.
- Require a simplified installation process inside the hull, carried out by one person only.

You can hold it firmly with one hand, while screwing with the other hand.


Code	Colour	Hose Ø B (mm)	Int. Ø F (mm)	Flush Flange Ø D (mm)	Overall length C (mm)	Cut-out Ø H independent of hull thickness G (mm)	Material
10254	White	25	20	60	105	Ø 32mm	PP
70601	White	25	20	60	105	Ø 32mm	PP



NEW



Code	Colour	Hose Ø B (mm)	Int. Ø F (mm)	Flush Flange Ø D (mm)	Overall length C (mm)	Cut-out Ø H independent of hull thickness G (mm)	Material
10255	White	25	20	60	110	Hull thckn. <20mm Ø 33mm	PP



Code	Colour	Hose Ø B (mm)	Int. Ø F (mm)	Flush Flange Ø D (mm)	Overall length C (mm)	Cut-out Ø H independent of hull thickness G (mm)	Material
39548	White	20	15	45	84	Hull thckn. < 20mm Ø 28mm	PA
39549	White	25	19	53	93	Hull thckn. < 20mm Ø 33mm	PA
39550	White	38	32	70	114	Hull thckn. < 20mm Ø 50mm	PA

*According to BSP thread dimensions


Thru-hulls

Thru-Hull Threaded with Non-Return Valve



43251


Code	Colour	Thread Diameter Ø A (mm)	Hose Ø B (mm)	Overall length C (mm)	Flush Flange Ø D (mm)	Thread Length E (mm)	Int. Ø F (mm)	Material
43251	White	55	-	116	75	-	41	PA
43248	White	55	45	116	75	78	37	PA
43253	White	55	50	116	75	60	41	PA



43248




43253



Thru-Hull Telescopic



Code	Colour	Thread Diameter Ø A (mm)	Overall length C (mm)	Flush Flange Ø D (mm)	Thread Length E (mm)	Int. Ø F (mm)	Material	Features
44763	White	51	65-215	80	50-200	40	PA	With non return valve




NEW

Code	Colour	Thread Diameter Ø A (inch)*	Overall length C (mm)	Flush Flange Ø D (mm)	Int. Ø F (mm)	Material
10258	White	1 1/4"	28-44	57	30	PP
10259	White	1 1/4"	48-75	54	30	PP

Thru-Hull System with Flap



Code	Colour	Hose Ø B (mm)	Overall length C (mm)	Flush Flange Ø D (mm)	Thread Length E (mm)	Int. Ø F (mm)	Max Length Of Lid I (mm)	Second Part			Material
								J (mm)	K (mm)	L (mm)	
47088	White	79	170	107	150	70	130	103	55	45	PA




49672
Drain Socket Cap

Thru-Hull with Non-return Valve



Code	Colour	Thread Diameter Ø A (mm)	Overall length C (mm)	Flush Flange Ø D (mm)	Thread Length E (mm)	Int. Ø F (mm)	Max Length Of Lid I (mm)	Material	Features
43242	Black	68	107	81	94	61	106	PA	With non return valve




Thru-hulls

Thru-Hull Outlet



NEW

Code	Colour	Thread Diameter Ø A (inch)*	Hose Ø B (mm)	Overall length C (mm)	Flush Flange Ø D (mm)	Thread Length E (mm)	Int. Ø F (mm)	Material
31352	Black	1 1/2"	16	75	71	20	12	PA



Thru-hull Accessories



43500



45391 - 45393



44230



45310



45309




45306 & 45322



45307 & 45312

Code	Description
43500	Drain plug with Non-Return Valve for Inflatable Boat, Ø35mm, Black
45310	Drain plug Rubber, Ø35mm, Black
45307	Expanding Drain Plug, Ø35mm, Black
45312	Expanding Drain Plug, Ø40mm, Black
44230	Spare Part for Non-return Valve, rubber
45306	Expanding Drain Plug, Ø22mm, Black

Code	Description
45322	Expanding Drain Plug, Ø25mm, Black
45309	Expanding Drain Plug Adjustable, Ø22mm, Black
45391	Drain Plug with Non-Return Valve for Thru-hull, Ø22mm, Black
45393	Drain Plug with Non-Return Valve for Thru-hull, Ø25mm, Black

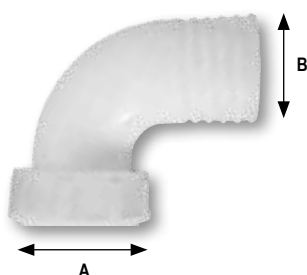

Thru-Hull 90°, Female Connector, White

Code	Locking Nut Thread A (inch)	Hose Ø B (mm)
197065	1 1/2"	38
197061	2"	50



Non-return Valve

Code	Diameter (mm / inch)
197023	Ø 40 / 1 1/2"
197024	Ø 50 / 2"



44093
Kit for Non-return Valve


Ball Valves



Ball Valve, Blue, PVC


Code	A (mm)	B (mm)	C (mm)	D (inches)	E (mm)	F (mm)	G (mm)	Weight (g)
44669	50	51	65	1/2"	16	46	78	140
44670	60	58	70	3/4"	19	52	90	200
44671	68	65	82	1"	22	60	104	300
44672	80	76	92	1 1/4"	24	68	116	450
44673	94	88	105	1 1/2"	24	78	126	690

Complies with UNI ISO 228/1 DIN 2999, BS21



Hose adaptor for Valve, threaded

Code	G Ø (inches)	Ø A (mm)	Ø B (mm)
44538	1/2"	20	22
44539	3/4"	25	27
44540	1"	30	32
44541	1 1/4"	40	42
44542	1 1/2"	50	52



NEW



Ball valves, PVC

Code	Ø A (inches)
90373	1/2"
90374	3/4"
90375	1"
70979	1 1/4"
70980	1 1/2"

NEW

Drain Sockets



16713

Plug for Drain Socket, White



Captive Plug with O-Ring for Drain Socket

Code	Colour
45276	White
45277	Black



16687

Buoyancy Tank Drain Socket with Plug, Black, Polyamide
Int. Ø : 18 mm, ext. Ø : 23 mm



16688



16689



43462
43463



43468



43469



95781
95782



43477
43478

Drain Socket with plug

Code	Specifications	Colour	Flange Dimensions (mm)	Overall Height (mm)	Height of Socket (mm)	Cutout Diameter (mm)	Depth Below Deck (mm)	Mini Internal Diameter (mm)
16688	Plain	White	48 x 36	28	19,5	27	15	19
16689	With 2 holes	White						
43462	With captive plug	White	54 x 33	55	25	27	20	19
43463	With captive plug	Black	54 x 33	55	25	27	20	19
95781	With captive plug	White	60x30	52	23	27	18	19
95782	With captive plug	Black	60x30	52	23	27	18	19
43468	With captive plug	White	Ø 40	55	25	27	20	19
43469	With captive plug	Black	Ø 40	55	25	27	20	19
43478	With 4 holes	Black	Ø 43	38	27	25	22	16,5
43477	With 4 holes	White	Ø 43					
16691	With captive plug	White	Ø 46	63	27	28	21	19
16690	Plain	White	Ø 48	76	66	28	62	19
16797	"Fast Lock"	White	Ø 43	107	96	27	91	19



16797



16691



16690

Ventilation

✱ Special colours available upon request.




Ventilation Shaft Grilles Cover

Code	Colour	Dimensions (mm)
47063	White	92 x 92
50152		118 x 118



12410

Ventilation Shaft Grilles
with Gasket, White



Ventilation Shaft Grilles Cover

Code	Colour	Ø (mm)
12409	White	85
16307	Grey	85
16308	Black	85



Ventilation Shaft Grilles Cover

Code	Colour	Dimensions (mm)
16311	Black	200 x 100
17657	White	200 x 100



Ventilator Connector, black

Code	Description	Hose Ø (mm)
50155	PVC straight connector	65 / 70
50156		100



Ventilation Shaft Grilles Cover

Code	Colour	Dimensions (mm)
47065	White	206 x 106



Ventilation Shaft Grilles, Double

Connects two ventilation exhausts behind one single louvred vent.

Code	Description	Colour	Dimensions (mm)
44545	Detachable double ventilation - Polyamide	White	255 x 115
44546		Black	255 x 115



16712

Plastic Strainer Grilled, Oval,
120x80mm, Black



Plastic Bilge Strainer

Code	Colour	Hose Ø (mm)	Output	Shape	Dimensions (mm)
13942	Black	18/20/24	Horizontal	Rectangular	145x60x38


Ventilation



44551
Ventilation Clam Shell
Cover, Round, Ø87mm,
White




44547
Ventilator with Water Outlet,
420x120mm, (built-in 385 x 90 x 60), White

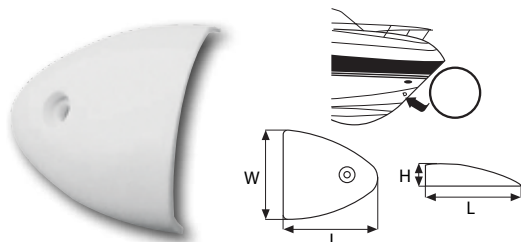

31519
Ventilation Clam Shell Cover, white
L55mm x W50mm x H12mm



54386
Ventilation Clam Shell Cover
For additional protection against heavy water intrusions. Suitable for 3" and 4" ventilators. To be fixed on top of the ventilator with 3 nylon fasteners. Made from polyamid, shock and UV-resistant. Compatible with common sealants and impervious to acetic acids. (215x180x70 mm)



Ventilator Connector Ø 76mm


Suitable for Ø 76.2 and 70 mm ducting hose. Manufactured from polypropylene for a good UV-resistance. It is extremely shock and load resistant, compatible with common sealants and impervious to acetic acids. Made to support a hose along a bulkhead. On the straight model, ventilation is ensured by a louvred opening, which also prevents heavy water intrusions.

Quick and easy installation :

Drill a Ø 76.2 mm hole. Notches ensure the perfect hold of the adapter in the bulkhead. Secure the adapter with 4 x M4 screws and sealant for waterproofness (compatible with most common sealants). Clip a louvred vent if necessary : moulded-in ribs contribute to the vent's secured position. Fit the hose on the adapter. Two lugs hold the hose, while waiting to be secured with stainless steel hose clips (not supplied).



54389






54390



47514

Code	Model
47514	straight
54389	elbow
54390	5 mm flange



Ventilation Shaft Grilles, Double

Connects two ventilation exhausts behind one single louvred vent.

Offers multiple combinations in conjunction with two adaptors (flange, straight or elbow stiffening adaptors). The vent is simply clipped on the stiffening adaptors (90 mm space between the two holes)



Code	Colour	Dimensions (mm)
54391	White	195 x 105 Ø 3"



Ventilation Shaft Grilles Cover, Ø76mm

Used either on its own to ventilate a locker or in conjunction with the stiffening adaptor for connection to a hose.

No screws required : neat aesthetics and time-saving assembly

Code	Colour
47515	White
47516	Grey
47517	Black

Ventilation



51069



60071

NEW



51070


Ventilator Connectors Ø 102mm

Polypropylene construction :
Shock and load resistant, impervious to fuel and acetic acid. Notches and lugs hold the hose in position ; in addition, the hose must be secured with stainless steel clamps. Connector is easy to fit, by means of 4 screws outside.

When installing the blower, we recommend to place the exhaust louvred ventilator in a reasonably protected area (for example, in the cockpit rather than on the transom), so as to prevent water intrusion into the ventilation circuit. An extra precaution consists in building an elbow in the hose.

Code	Description
51069	Elbow
51070	Straight
60071*	Shaft Grilles Cover

* Also available in other colour upon special request

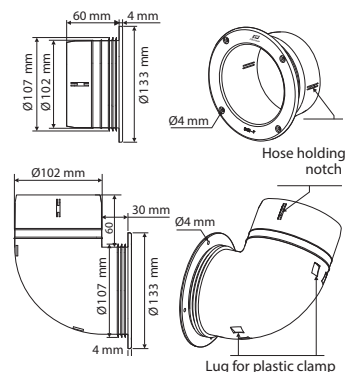


60070
Blower & Battery for
Autonomous Solar
Powered Fan

NEW



60069
Solar Cell for
Autonomous Solar
Powered Fan

Connection Example

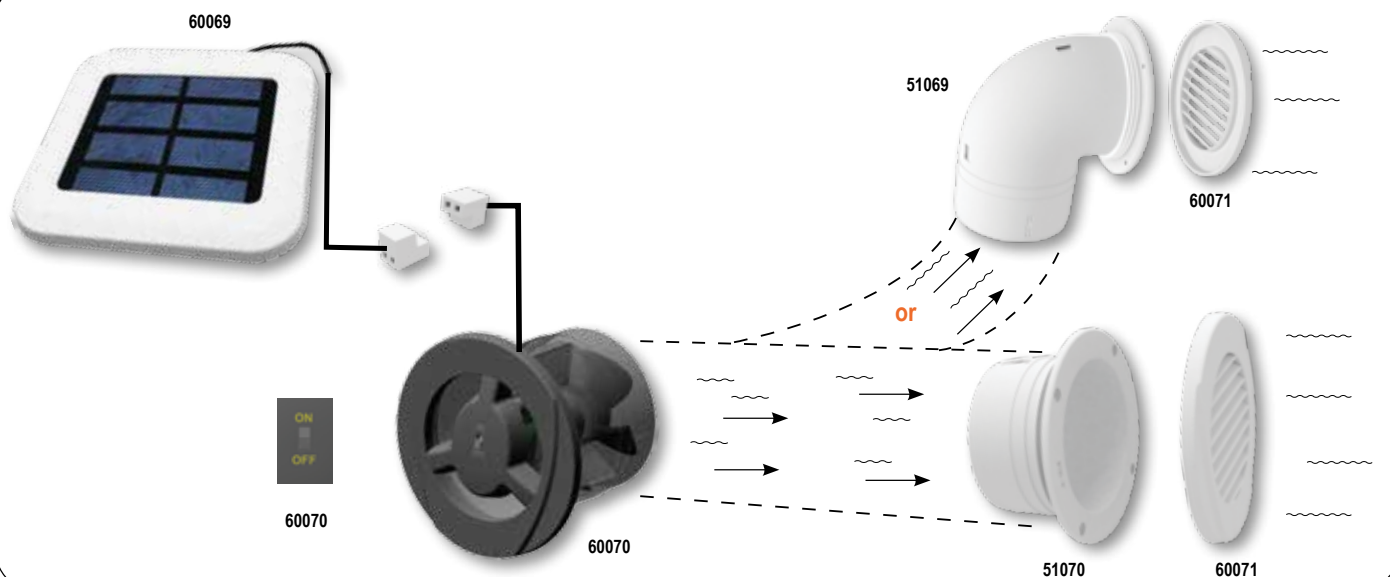



Nuova Rade

Marine - Plastics Technology Experts

Deck Equipment

Tables & Pedestals



49722



47087



197241



197242

Table tops, white



Code	Model	Material	Length (mm)	Width (mm)	Thickness (mm)
49722	Rectangular	Polyethylen	700	500	30
47087	Round	Polyethylen	Ø 600		30
197241*	Round	White ASA, impervious to UV and chemical solvents	Ø 610		40
197292*	Oval	White ASA, impervious to UV and chemical solvents	760	450	40

*with 2 glass holders

Compatibility Chart

Description		Code	Table Top			
						
Top Plate		43263	Yes	Yes		
Bottom Plate	Deck Mount	196163	Yes	Yes	Yes	Yes
	Flush Mount	197291	Yes	Yes	Yes	Yes
		43261	Yes	Yes	Yes	Yes
Pedestals	Fixed	44048	Yes	Yes	Yes*	Yes*
		44049	Yes	Yes	Yes*	Yes*
		44060	Yes	Yes	Yes*	Yes*
	Telescopic	44058	Yes	Yes	Yes*	Yes*

*Screws directly on table top

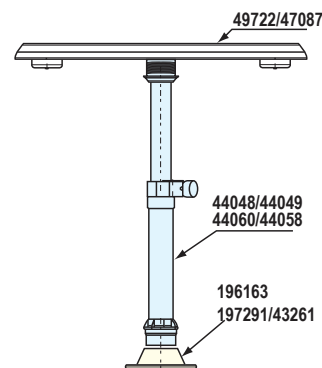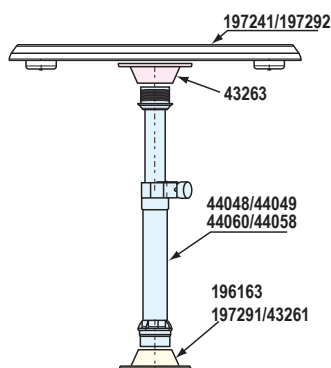

43263

Table Top Plate,
Ø190mm-H.55mm, White



196163

Table Bottom Plate, Deck-mount,
Ø190mm-H.55mm, White



197291

Table Bottom Plate, Flushmount,
Aluminium, Ø150mm-H.9,5mm



43261

Table Bottom Plate, Flushmount,
Ø190mm-H.10mm, White



197289

Clips for table pedestals



Table Pedestal

Code	Description	Tube Ø (mm)	Height H1 (mm)	Height H2 (mm)
44048	Fixed tube	60	530	610
44049	White enamelled aluminium	60	690	770
44060	Telescopic tube	60	300 / 520	380 / 600
44058	White enamelled aluminium	60	400 / 730	480 / 810

Utility & Storage Hatches

Storage Cases

These cases will definitely solve the problem of storage on the deck. They are available in various sizes and can be fitted with single or full cover to protect the contents from spray. They are made of highly resistant plastic material, while the optional covers are made of tinted see-through acrylic (PMMA) for durability and visibility. The Lalizas storage cases are suitable for horizontal and vertical use and they are very easy to mount using silicone or polyurethane construction adhesive. On the rear side of the cases drilling points are marked, if screws are required.



11464





11459



11454

Storage Cases, White

Code	A (mm)	B (mm)	C (mm)	H (mm)	I (mm)
11464	428	184	112,5	597	300
11459	545	245	394	485	193
11454	692	394	132	385	140



Cut out piece (cm)



11456 - 11461 - 11466



11458

Storage Cases Covers

Code	Length (mm)	Width (mm)	Thickness (mm)
11466	382	68	4
11461	481,5	99	
11456	596	160	
11458	304	304	5

Choosing the right Cover for your Storage Case (Optional)

Storage Cases Codes	Storage Cases Covers Codes	
	Single Fixed	Horizontal Full Sliding
11454	11456	11458
11459	11461	-
11464	11466	-




196671



196673

Utility Storage Hatches, Side Mount, white

Code	Description
196671	Right
196773	Left
196673	Right with glass holder
196775	Left with glass holder



A (mm)	B (mm)	C (mm)	D (mm)	G (mm)	H (mm)	I (mm)
266	561	195	475	125	496	200




Handle-Sunglasses Holder

Code	Colour	Length (mm)	Height (mm)
44535	White	175	85



45344

Utility Storage Hatch, 1/2 Open, White



A (mm)	B (mm)	C (mm)	D (mm)	G (mm)	H (mm)	I (mm)
170	420	120	370	100	380	130


Utility & Storage Hatches



Storage Cases for Fire Extinguisher
Allows safe and protected storage of a fire extinguisher in the cockpit or dashboard.
UV-resistant white ASA.


Code	Extinguisher Capacity	Door	Colour
196461	1kg	Yes	White
196666		Transparent	
50006		No	
196465	2kg	Yes	
196675		Transparent	
50010		No	

Extinguisher	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
1 kg	174	424	120	370	105	434	196	124	374
2 kg	204	474	150	415	120	484	226	154	424

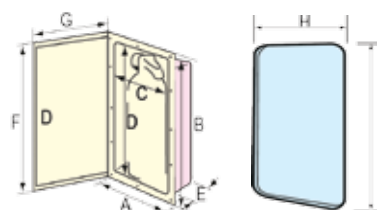

195263
Case for Toilet Paper with Door
White ABS

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
160	160	118	128	118	167	162	125	135

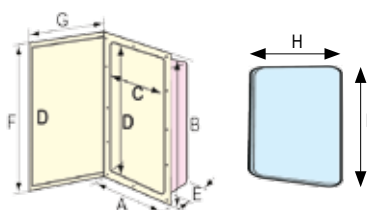


195258
Holder for Toilet Paper, Plastic
To be used with toilet paper dispenser 195263. White ABS, UV resistant.



196663
Case for Electrical Control Panel with lid, white
UV-resistant. Water repellent.

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
275	375	180	280	80	210	310

Special colours and/or dimensions available upon request.

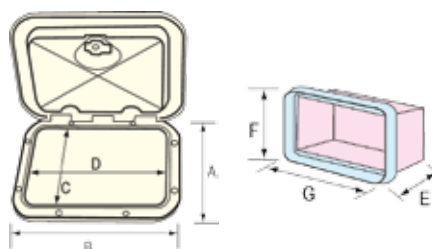


Electric Equipment Cases

CE



53250

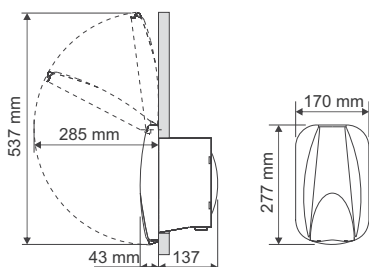

53249



Case for Electric Power Shore Center, white
Polypropylene outer case, impervious to hydrocarbons and temperature fluctuations. ABS hinged cover, resistant to shocks and UV-rays. Pre-wired for easy installation to the boat's network.


Code	Voltage	Current
53249	220 V	16 A
53250	220 V	32 A

European plus, comes with a bi-polar residual circuit breaker and LED indicator when switched on.




Case for Battery Switch with Watertight Lid
UV-resistant. Watertight gasket included

Code	Colour	A (mm)	Ø B (mm)	C (mm)	D (mm)	E (mm)
196383	White	95	68	5	72	95
196387	Cream	95	68	5	72	95



Case with Battery Switch, with Watertight Lid
Casing with integrated battery switch. Watertight gasket included.

Code	Colour	Capacity	A (mm)	Ø B (mm)	C (mm)	D (mm)	E (mm)
196384	White	100 A (500 A for 10 sec. max)	95	68	5	72	95
196385	White	250 A (1000 A for 10 sec. max)	95	68	5	72	95
196388	Cream	100 A (500 A for 10 sec. max)	95	68	5	72	95
196389	Cream	250 A (1000 A for 10 sec. max)	95	68	5	72	95



99558
Battery switch w/cap
for cases 196384 & 196388




195051
Battery switch
for cases 196385 & 196389



Case Cover for Radio/CD

Code	Colour
50281	White
195265	Smoked, transparent

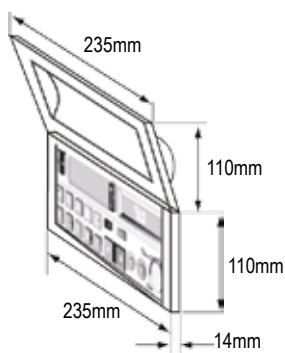

196069
Univ.Case Cover for Radio/CD,
Curved, Smoked Transparent

Fastening Accessories



Plastic Support Clip,
Screwed

Code	Diameter (mm)	Colour
45191	15	White
45192		Black
45197	20	White
45198		Black
45203	25	White
45204		Black
45209	30	White
45210		Black
45215	35	White
45216		Black
45235	40	White
45236		Black
45241	45	White
45242		Black



Plastic Support Clip

Code	Diameter (mm)
16702	16
16705	19
16703	25
16704	30
16707	50



Plastic Support Clip,
Adjustable
Ø 25/32 mm

Code	Colour
45229	White
45230	Black



45217
Plastic Support Clip,
Double, Adjustable,
Ø 18/25 mm, Black





45224
Plastic Support Clip,
Adjustable,
Ø 33/40 mm, Black



Plastic Support Clip,
Folding, White

Code	A (mm)	B (mm)	Ø C (mm)
196072	72	82	30



Hinges

Code	Colour	Description	Pin	L (mm)	H (mm)	Thickness (mm)	Opens Through	Material
16672	Black	Rectangular	St. teel	30	60	-	255°	Polyamid
16673	Black			60	40		255°	Polyamid
16674	Black			40	75		230°	Polyamid
43679	White	Round	St. teel	70	40	4.5	270°	Polyamid
43680	Black							
43682	White	Semi Oval	St. teel	90	40	4.5	270°	Polyamid
43683	Black							
43685	White	Semi Oval	St. teel	100	40	4.5	270°	Polyamid
43686	Black							
43667	White	Double Oval	St. teel	100	40	4.5	270°	Polyamid
43668	Black							
43673	White	Double Oval	St. teel	135	40	4.5	270°	Polyamid
43674	Black							
43646	White	Hexagonal	St. teel	63	40	4.5	270°	Polyamid
43647	Black							
43652	White	Hexagonal	St. teel	95	60	4.5	270°	Polyamid
43653	Black							
43658	White	Offset	St. teel	80	60	4.5	270°	Polyamid
43659	Black							
43661	White	Offset	St. teel	100	60	4.5	270°	Polyamid
43662	Black							

Fastening Accessories



Finger Flush Pull, Plastic

Code	Colour	Dimensions	Finger hole Ø
44227	White	57 x 57 mm	44 mm
47752	Cream	57 x 57 mm	44 mm



Shackle, Palstic

Sail slide hank, suitable to attach to sail sliders

Code	Colour	Diameter Ø (mm)	Safe working load (kg)
16764	White	6	80



Door Fastener, Plastic

Code	Colour	Material	Dimensions
43791	Black	Nylon	22 x 32 mm
13872	White		



Anti-Rattle Barrel Bolt, White

Code	Material	Dimensions
43851	Plastic	(25+60) x 30 x 13 mm



Bracket for VHF Microphone

Code	Colour	Length (mm)	Width (mm)	Height (mm)
44532	White	35	35	8
44533	Black			



43257

Antenna Bracket for Rail
Ø18-27mm, Plastic, White



43226

43230

43232

43225

43236 - 43237

Flag Staff

Code	Description	Length (mm)	Colour
43226	with 2 bases: 1 vertical & 1 horizontal	290	Black
43230	with 2 bases: 1 vertical & 1 horizontal	390	Black
43232	with rubber base	395	Black
43225	tilted, screw-type	300	Black
43224			Grey
43236	rubber base Ø 92 mm. Suction cup fastening device.	-	Grey
43237	Compatible with models 43225, 43226, 43230.		Black

Sail & Bimini-Top Equipment

Cleat Polyamide


Code	Dimensions (mm)	Colour
43377	60x19	White
43378		Black
43380	80x22	White
43381		Black
43383	110x28	White
43384		Black
43386	145x35	White
43387		Black
43389	180x45	White
43390		Black
43392	220x52	White
43393		Black



NEW

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
150	24	14	35	6

16881
Jib Sheet Cleat, Polyamide



16684



16685 - 16686



Fairlead Handed Polyamide
(pair - left & right)

Code	Dimensions (mm)
44417	110x20
44420	160x25

16681

44426-7

Fairleads

Code	Ø Max. rope (mm)	Overall dimensions Width x Height (mm)	Hole spacing (mm)	Colour
16684	18	65x28	45	Black
16685	13	41x26	30	
16686	17	55x30	40	
16681	7	35x15	19	
44427	10	40x17	28	White
44426	10	40x17		



Hook for Inflatable Boat Cover
Rope or shock cord 8 mm max.
Length 40 x height 40 mm

Code	Colour
28112	Black
44015	White
44016	Grey



44028 - 44029



44034 - 44035



44040 - 44041



44046 - 44047

Snap Hook, Polyamide

Suitable for lightweight use only

Code	Model	Colour	For shock cord Ø (mm)	Length (mm)	Ø Eye (mm)
44028	With eye	White	4	42	10
44029	With eye	Black		42	10
44034	With eye	White	6	49	10
44035	With eye	Black		49	10
44040	With eye	White	8	58	12
44041	With eye	Black		58	12
44046	With eye	White	10	68	14
44047	With eye	Black		68	14

Sail & Bimini-Top Equipment



16795



43977



44023



43994-5

Snap Hook, Polyamide

Suitable for lightweight use only

Code	Model	Colour	For shock cord Ø (mm)	Length (mm)	Ø Eye (mm)
16795	With eye	Black	8	55	15
44022	With eye	White	6	40	9
44023	With eye	Black		40	9
43994	With eye	White		38	9
43995	With eye	Black		38	9
43977	Standard	Black	5	48	-



Hook Spinnaker Small

Code	Colour	For rope Ø	Length (mm)	Width between holes (mm)
16679	Black	Sheet 6 mm max	55	42



Hook Multi-Purpose Small

Code	Colour	For rope Ø	Length (mm)	Width between holes (mm)
16680	Black	Rope or shock cord 4 mm max.	30	20



Hook Multi-Purpose Small

Code	Colour	For rope Ø	Length (mm)	Width between holes (mm)
43982	White	Rope 6 mm max. Shock cord 8/10 mm max.	30	20
43983	Black			



Hook Multi-Purpose Small

Code	Colour	For rope Ø	Length (mm)	Width between holes (mm)
43988	White	Rope 4 mm max. Shock cord 6/8 mm max.	40	30
43989	Black			



OCEAN

Cross-Tree Spreader Boots

Code	Colour	Length (mm)	Width (mm)	Height (mm)
197755	White	200	110	100
197756	Silver			

NEW



Washer for Screw, Plastic

Grommet only

Code	Colour	Diameter Ø (mm)
44977	White	3.5
44983		4.5
44989		5.5
44978	Black	3.5
44984		4.5
44990		5.5




45358

Twist Studd & Clinch Plate,
Ø29mm, 35x17mm, Black

Windshield screw caps

Set of 3

Code	Colours	Description
43835	White	Spacer Overall Ø 20mm Overall Height 10mm
43836	Black	Hole Ø 7mm



Sail & Bimini-Top Equipment

Thimbles

Code	Rope Ø (mm)	Material
16946	3	Nylon PA
44592	4	
44594	5	
44596	6	
24134	7	
44598	8	
44600	10	
44602	12	
29372	14	
44605	16	
44607	18	
44609	20	
44611	22	
44613	24	



Cap & Washer for Screw, Plastic

Grommet with screw cap*

Code	Colour	Diameter Ø (mm)
44916	Black	3.5
44914	White	
44923	White	4.8
44925	Black	4

*screw not included



Mounting Fittings for Bimini-Tops Frame

Code	Colour	For tube Ø (mm)
43091	Black	20
43090	White	
43103	Black	22
43102	White	



T-Fitting for Rails, Black

Code	Model	For tube Ø (mm)
44051	T 90°	22
44052	T 60°	



Mounting Fittings, Bimini-Tops Frame, Clamp-on

Code	Colour	For tube Ø (mm)
43088	Black	20
43087	White	
43100	Black	22
43099	White	



Mounting Fittings, Bimini-Tops Frame, 2-Wings

Code	Colour	For tube Ø (mm)
43082	Black	20
43081	White	
43094	Black	22
43093	White	



Mounting Fittings, Bimini-Tops Frame, 1-Wing

Code	Colour	For tube Ø (mm)
43085	Black	20
43084	White	
43097	Black	22
43096	White	



Mounting Clip 10mm for Bimini-Top, Ø25mm Tube

Code	Colour
35002	Black
43105	White



43246



43247

Rectangular Socket 90°, Plastic, Black


Code	Base Dimensions	Diameter (mm)	Model
43246	74x39x38 mm	22	90°
43247	89x39x44 mm		60°

Sail & Bimini-Top Equipment



Clevis Fork

Code	Description
43066	for Bimini Tops Socket 43107, White
43067	for Bimini Tops Socket 43108, Black

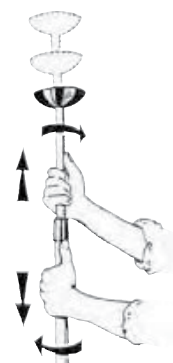

**Bottom Socket for
Bimini Tops**

Code	Colour
43107	White
43108	Black



Suction Disc

Code	Description
43233	Grey suction disc Ø 92 mm
43234	Black suction disc Ø 92 mm

**Boat Cover Support,
Aluminium Telescopic**
Ideal for wintering, to prevent water
stagnation in the awning.

Code	Height (cm)
43213	From 66,5 to 102
27497	From 86,5 to 151
43214	From 125,5 to 202



43872



43871



43858



43866



43857

Buckles

Code	Colour	Material	For webbing (mm)	Width (mm)	Length (mm)
43871	White	Plastic	30	34	35
43872	Black	Plastic			
43865	White	Plastic	30	34	35
43866	Black	Plastic			
43858	Black	Plastic	50	62	84
43857	-	INOX	50	54	74


Transom Pads



Transom Pad, 320x220mm

Offering protection against outboard clamp damage for most sizes of transoms. This pad is Made of rigid UV stabilized polypropylene, with a non-slip surface for secure engine mounting.
Dimensions: 320x220x64mm

Code	Colour
10314	White
72032	Grey
72033	Black



Transom Pad, 230x86mm

This pad is suitable for smaller transoms and outboards. Made of rigid UV stabilized plastic. The pad protects against damage whilst providing a secure non slip surface for outboard engine mounting.
Dimensions: 230x86x5mm

Code	Colour
10317	White
72034	Grey
72035	Black



16943

Transom Pad Re-inforced
Rigid non-slip plastic. Prevents outboard clamps from damaging the transom.
Dimensions : 250 x 90 mm.



Transom pad

Code	Colour	Length (mm)	Height (mm)
45343	Black	230	86
45341	White		
45342	Grey		
45339	Black	270	98
45337	White		
45338	Grey		



Transom pad

Code	Colour	Length (mm)	Height (mm)
45331	Black	300	220
45329	White		
45330	Grey		
45335	Black	450	360
45333	White		
45334	Grey		



Transom pad tilted

Code	Colour	Length (mm)	Height (mm)
195139	Black	450	360
195136	White		
195138	Grey		



Transom Pad, with cleft

Code	Colour	Length (mm)	Height (mm)
45327	Black	450	360
45324	White		
45326	Grey		

* Special colours available upon request.

Steering Equipment



**Cable Boot Adjustable
with Screwed Ring**

Code	Colour	Cut-out Ø	Overall Ø	Height
43756	Black	85 mm	105 mm	68 mm
43754	White			68 mm



**Cable Boot
with Screwed Ring**

Code	Colour	Cut-out Ø	Overall Ø	Height
31523	Black	120 mm	150 mm	110 mm
43145	White			110 mm
31525	Black	55 mm	105 mm	65 mm
43139	White			65 mm



**Cable Boot Split
with Screwed Ring**

Code	Colour	Cut-out Ø	Overall Ø	Height
43155	Black	105mm	115mm	52mm



**Cable Boot Double
with Screwed Ring**

Code	Colour	Cut-out Ø	Overall Ø	Height
43133	Black	59 mm	89 mm	15 mm



**Cable Boot
with Screwed Ring**

Code	Colour	Cut-out Ø	Overall Ø	Height
43168	Black	60 mm	108 mm	140 mm



**Cable Boot
with Plastic Embedded Ring**

Code	Colour	Cut-out Ø	Overall Ø	Height
43137	Black	59 mm	89 mm	105 mm



Cable Boot Flushmount

Code	Colour	Cut-out Ø	Overall Ø	Height
43160	Black	50 mm	70 mm	60 mm
43159	Grey			
43158	White			



Cable Boot Flushmount

Code	Colour	Cut-out Ø	Overall Ø	Height
31521	Black	69 mm	103 mm	109 mm
43162	White			
43163	Grey			



Cable Boot Flushmount

Code	Colour	Cut-out Ø	Overall Ø	Height
43167	Black	76 mm	115 mm	140 mm
43165	White			
43166	Grey			

Handrails & Footrest




**Handrail Ø22mm,
Stainless Steel**

Code	Length (mm)
44209	475
44210	625





44213
Footrest Ø22mm,
Stainless Steel, 440x120mm


Ladders

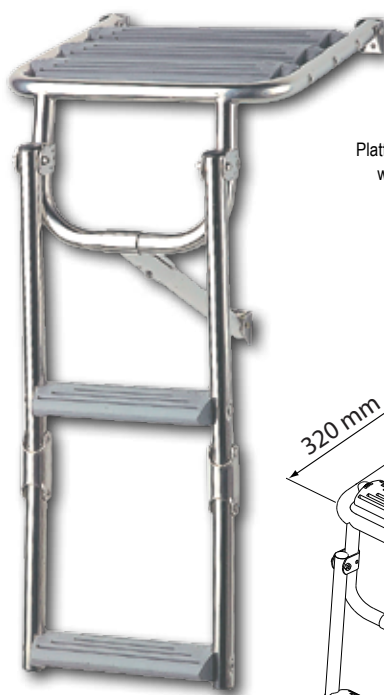

29390
Platform Ladder, Inox 316,
with 2 Plastic Steps

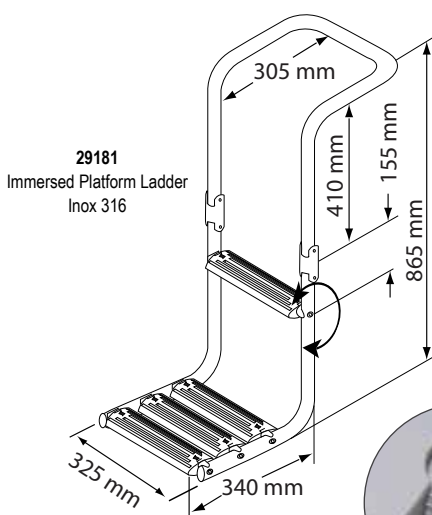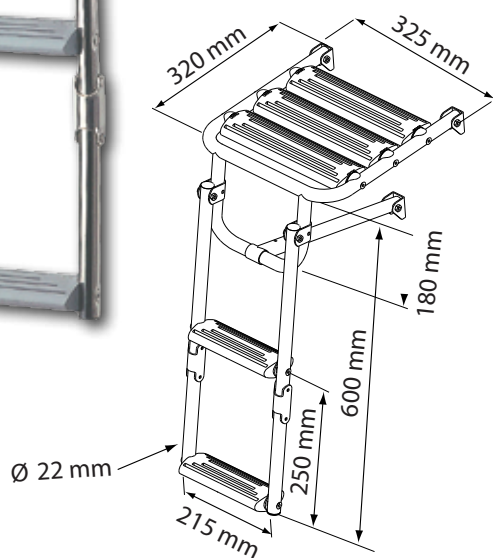


29181
Immersed Platform Ladder
Inox 316

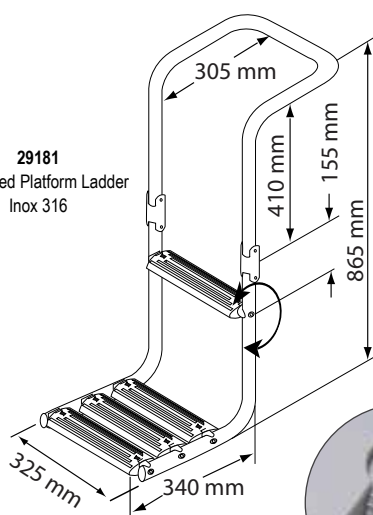


NEW



Adjustable Steps

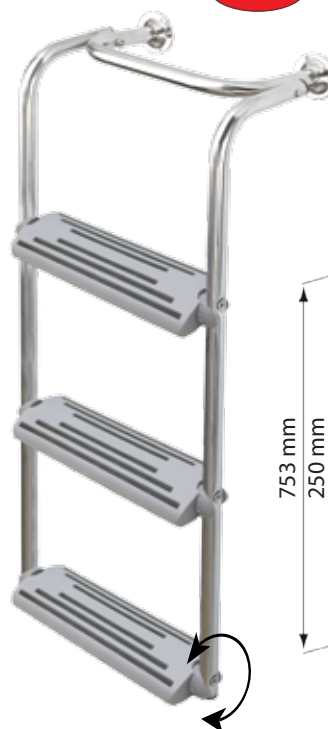

55694
Bow Ladder, Inox 316
3 steps

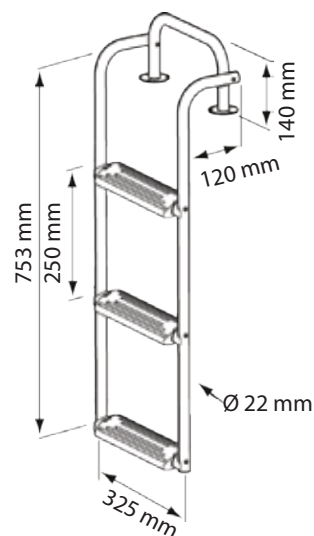

Adjustable Steps

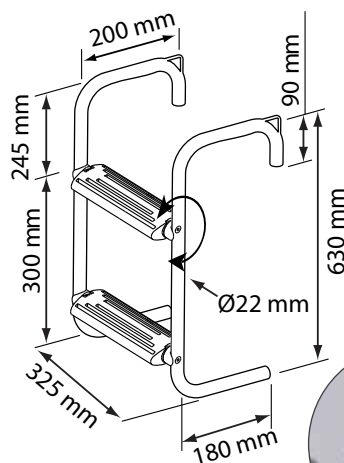

55706
Raft Ladder, Inox 316
2 steps


NEW

Adjustable Steps



Folttable Ladder, Inox 316, 180°

Code	A (mm)	B (mm)	Steps
55695	1050	405	2 + 2
55696	1300	655	3 + 2
55697	1300	405	2 + 3
55698	1550	655	3 + 3

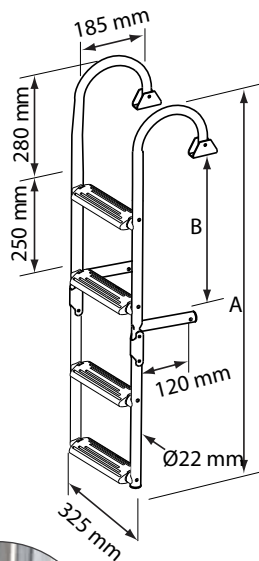

NEW




Adjustable Steps



Folttable Ladder, Inox 316, 90°

Code	A (mm)	B (mm)	Steps
55699	785	300	1 + 2
55700	835	370	2 + 2
55701	1085	620	3 + 2
55702	1085	370	2 + 3
55703	1335	620	3 + 3

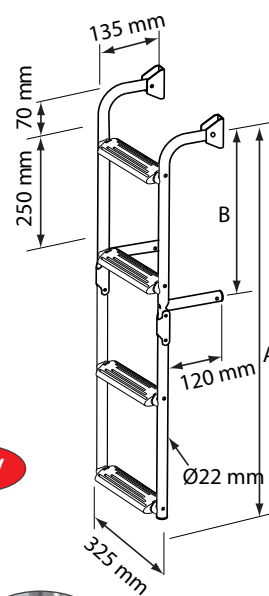


NEW



Adjustable Steps




30535
Folttable Ladder, Inox 316
for Narrow Transom, 2+2 steps, 180°

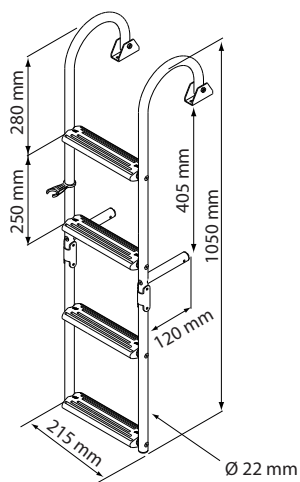

NEW

29392
Bow Ladder, Inox 316, 3 steps

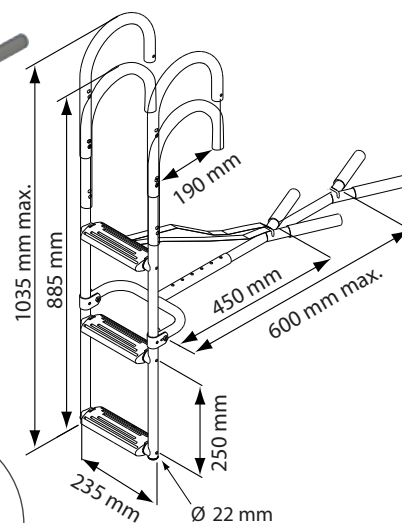


Adjustable Steps




**Foltable Ladder for Narrow Transom,
Inox 316, 90°**

Code	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Steps
30536	215	835	120	370	70	250	2 + 2
36275	215	705	120	205	160	250	1 + 2

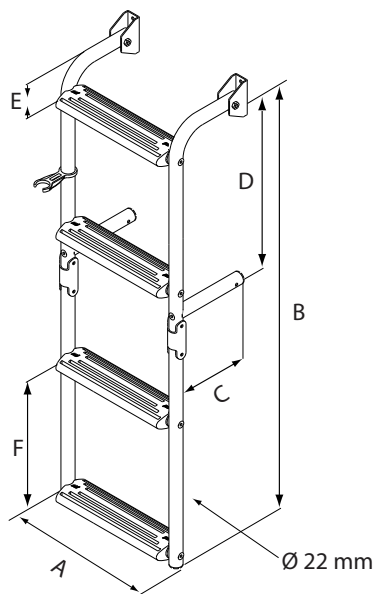

29398
Foltable Ladder, Inox 316
for Narrow Transom, 2+1 steps

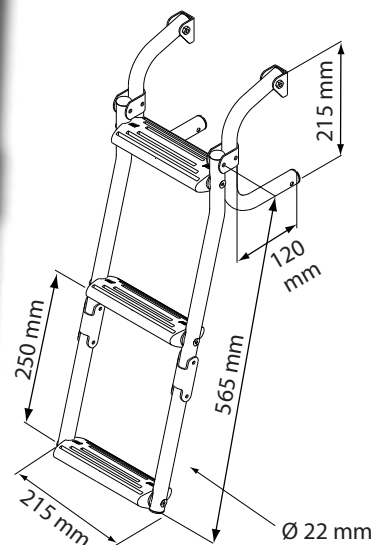

NEW

Options & Accessories



27073
Fixing plate for ladder, Inox



12563
Stand-off extension, Ø25, 12cm



12587
Ladder support base



30537
Kit for adjustable step, 2 pcs



12572
Add on step, Inox 316



Set Ladder Step with fitting, grey

Code	Length (mm)	For tube
15684	180	Ø 22
15680	260	Ø 22



Nuova Rade

Marine - Plastics Technology Experts


Mooring

Marking Buoys

Marking Buoy Cylindrical

Made of rigid plastic. A metal eyelet reinforces the ring.


Code	Use	Colour	Description	Dimensions					Buoyancy	
				Ø Ext (mm)	Ø Int (mm)	H (mm)	H2 (mm)	Ø A (mm)	Overall (kg)	In use (kg)
16433	Portside channel marking	Yellow	Empty	400	250	740	363	38	38	14
31928		Red							36	12
16434		Yellow	Foam filled							
31312		Red								
43404	Large size for channel entrance Portside side	Yellow	Empty	800	510	1610	790	55	290	110
43405		Red							265	95
16436		Yellow	Foam filled							
35628		Red								



Marking Buoy Bi-Conical

Made of rigid plastic. A metal eyelet reinforces the ring.


Code	Use	Colour	Description	Dimensions				Buoyancy	
				Ø Ext (mm)	H (mm)	H2 (mm)	Ø A (mm)	Overall (kg)	In use (kg)
16440	Starboard channel marking	Yellow	Empty	400	640	363	55	30	14
31929		Green						28	12
16442		Yellow	Foam filled						
31311		Green							
43418	Large size for channel entrance. Starboard side	Yellow	Empty	800	1610	770	55	200	100
43420		Green						190	90
16443		Yellow	Foam filled						
35629		Green							



Marking Buoy Spherical

Made of rigid plastic. A metal eyelet reinforces the ring.

Code	Use	Colour	Description	Dimensions				Buoyancy	
				Ø Ext (mm)	H (mm)	H2 (mm)	Ø A (mm)	Overall (kg)	In use (kg)
16427	Marking the limits of reserved areas	Yellow	Empty	400	660	32	55	45	14
16428		Yellow	Foam filled					42,5	12,5
35750		Red	Empty					45	14
16430	Marking the limits of reserved areas	Yellow	Foam filled	600	1100	-	55	124	39
43411	Outer rim of the 300 m coastline	Yellow	Empty	800	1610	810	55	412	102
11673		Yellow	Foam filled					400	90
43412		Red	Empty					412	102



Mooring Buoys



Mooring Buoy Bi-Conical, Plastic
UV resistant

Code	Colour	Diameter (mm)	Height (mm)	Buoyancy	
				overall (kg)	in use (kg)
43433	Yellow	220	540	5,5	2,7
16412	White				
16413	Orange				
43431	Yellow	280	640	10	5
43430	White				
43429	Orange				
43427	Yellow	320	750	24	12
16414	White				
16415	Orange				
30631	Yellow	520	1070	61	30
16416	White				
16417	Orange				



Mooring Buoy Bi-Conical, with Foam & Galvanised Steel Rod
UV resistant

Code	Colour	Diameter (mm)	Height (mm)	Buoyancy	
				Overall (kg)	In use (kg)
43441	Orange	320	660	18	9
43442	White				
43444	Orange	320	880	18	9
43445	White				
43447	Orange	520	1030	58	29
43448	White				



Mooring Buoy Rigid Plastic

Code	Colour	Diameter (mm)	Height (mm)	Buoyancy	
				Overall (kg)	In use (kg)
16389	Yellow	250	390	9,5	4,5
16387	White				
16388	Orange				




NEW

Anchor Mooring Buoy with Reflective Tape & Line 11m

It marks the exact position of the anchor with a lead counterweight that self adjusts the line length with depths between 4 and 10 m. Solas approved reflective tape to help buoy location at night. It helps to retrieve a fouled anchor by lifting it up from the anchor crown. Easy to use and stow it away in the anchor peak. Material: HDPE.

Code	Diameter (mm)	L line (m)	Height (mm)	Weight (kg)
197765	200	11	507	2

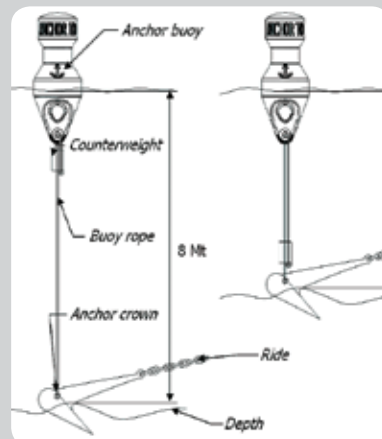

Mussel Farming Buoys



Marking Buoy Mussel Farming, HDPE
High-density polyethylene, UV resistant

Code	Colour	Diameter (mm)	Height (mm)	Buoyancy	
				Overall (kg)	In use (kg)
197460	Yellow	530	1000	65	32
197451	Black				
197454	White				
197457	Orange				
197459	Yellow	530	1200	110	55
197450	Black				
197453	White				
197456	Orange				
197458	Yellow	530	1400	150	75
197449	Black				
197452	White				
197455	Orange				

Surface Floats



16381

Surface Float w/Hole, Cylindrical, white-red
Dimensions: Ø 60 x 140 mm Hole: Ø 10 mm.



43395

Surface Float w/2 Eyelets, Spherical, white-red
Overall Height: 15cm, Ø 13cm,
top eye 1,2cm, weight: 130gr
Buoyancy: Overall 542gr, In use 271gr

Surface Float w/Hole, Round
Polyethylene



Code	Colour	Diameter (mm)	Rope Diameter (mm)	Buoyancy	
				Overall (g)	In use (g)
43952	Orange	45	7	58	29
43956		50	8	62	31
43960		57	8	71	35
43970		75	12	95	47
43971	White	75	12	95	47

Surface Float w/Hole, Spherical
Suitable for fitting marker flag



Code	Colour	Diameter (mm)	Rope Diameter (mm)	Buoyancy	
				Overall (g)	In use (g)
43399	Yellow	190	19	1,8	0,9
16384	Orange				
16383	White				
43397	Yellow	260	28	8,5	4,2
16386	Orange				
16385	White				

Mooring - Fendering Accessories



56860

Inflation Adapter for Fenders Valve

Specially designed for the inflation of Performance fenders and Bumper dock fenders. Compatible with all our pumps and inflators.



Hook for Fender
Polyamide

Code	Description	Colour	Length (mm)	Width (mm)	Eye Ø (mm)
43634	For installation on a Ø 6 mm cable	White	86	25	7
43635		Black			
43640	For installation on rail Ø from 20 to 22 mm.	White	85	38	21
43641		Black			

MILLA Mooring Rubber Compens



Code	For boat (m)	For line Ø (mm)	Length (mm)	Width (mm)	Thickness (mm)
44264	4,5	16	220	40	33
44265	7	20	270	45	33
44266	10	20	330	50	36

Paddles & Hooks



Paddle Jointed w/Double Hook, Black

Code	Length (cm)	Diameter (mm)
44347	141	30



Paddle Jointed with End Cup for Tender, Black

Code	Length (cm)	Diameter (mm)
44345	138	35



Paddle Jointed for Inflatable Boat, Black

Code	Length (cm)	Diameter (mm)
44367	160	35



Paddle Jointed with Collar for Inflatable Boat, Black

Code	Length (cm)	Diameter (mm)
44361	188	35




Kayak Dismountable Paddle, Black

Code	Length (cm)	Diameter (mm)
44343	220	30

Paddles & Hooks

Paddle with Collar for Inflatable Boat, Black

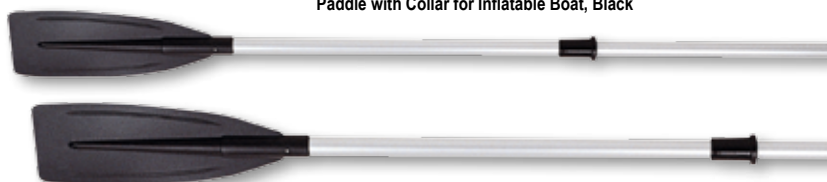

Code	Length (cm)	Diameter (mm)
44364	210	35
44362	185	35

Paddle with End Cup for Inflatable Boat, Black



Code	Length (cm)	Diameter (mm)
44344	140	35

Paddle with Double Hook, Black




Code	Length (cm)	Diameter (mm)
44346	140	30

Canoe Paddle, Black




Code	Length (cm)	Diameter (mm)
44342	218	30

Paddle Telescopic with Double Hook, Black

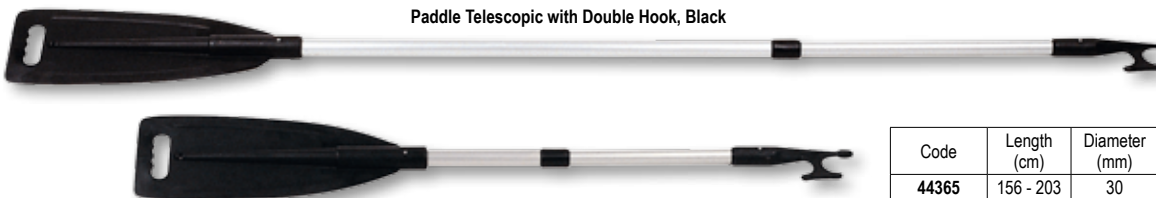

Code	Length (cm)	Diameter (mm)
44365	156 - 203	30
44366	104 - 127	30

Paddle Telescopic with Double Hook, Black



Code	Length (cm)	Diameter (mm)
44348	143 - 195	30

Paddle Telescopic with Double Hook, Grey



Paddle Telescopic with Double Hook, Grey



Code	Length (cm)	Diameter (mm)
44349	156 - 203	30
44350	104 - 127	30

Paddles & Hooks

Floating Hook, Anodised Aluminium, Black



Rubber end buffer.
Plastic hook, black

Code	Length (cm)	Ø Shaft (mm)
12517	120	25
12518	180	
12519	240	

Floating Hook with 2Ends, Anodised Aluminium, Black



Rubber end buffer.
Plastic hook, black

Code	Length (cm)	Ø Shaft (mm)
44250	144	25
44258	180	
44259	216	30

Float. Hook 2-Ends, White Aluminium, Black



Rubber end buffer.
Plastic hook, grey

Code	Length (cm)	Ø Shaft (mm)
44263	180	30

Telescopic Hook 2-Ends, Anodised Aluminium, Grey



Telescopic Hook 2-Ends, Anodised Aluminium, Black



Rubber handle.
Quarter turn locking action, at desired length.
Plastic hook

Code	Length (cm)	Ø Shaft (mm)	Colour
44256	62 to 91	30	Grey
44257	62 to 91		Black
44252	120 to 196		Grey
44253	120 to 196		Black

Telescopic Hook 2-Ends, White Aluminum, Grey



Rubber handle.
Quarter turn locking action, at desired length.
Plastic hook

Code	Length (cm)	Ø Shaft (mm)
44262	62 to 91	25
44261	120 to 196	

Telescopic Hook, Anodised Aluminium, Black



Rubber handle.
Quarter turn locking action, at desired length.
Plastic hook, Black

Code	Length (cm)	Ø Shaft (mm)
16593	120 to 200	25

Floating Hook with 1-End, Pine



Black hook

Code	Length (cm)	Ø Shaft (mm)
16591	120	30
16592	180	30

Paddle & Hook Accessories



Oar Collar, Plastic
Heavy duty flexible PVC. For easier fitting, submerge the collar in soapy water.

Code	Diameter (mm)
16543	32
16544	36
16545	45



44085
Paddle End Cap,
Internal Ø35mm, Black



Oar Collar, Plastic

Code	Diameter (mm)	Height (mm)
44175	35	45
44176	40	45
44177	45	55
44178	50	55
44180	55	63



Handgrip, PVC

Code	Diameter (mm)	Colour
44219	25	Black
44216	30	
44218	25	Grey
44215	30	

Blade for Paddle (Spare)
Length 496 x Width 170 mm

Code	Diameter (mm)	Colour
44357	30	Black
44360	35	
44356	30	Grey
44359	35	




44681
44682
197207
197208



43587
197209



43588
197210



Oarlock Polyamide

Code	Ø A (mm)	Ø B (mm)	Ø C (mm)	Ø D (mm)	Colour
44681	31	51	55	17	Black
44682	37	56			
197207	31	51			White
197208	37	56			

Oarlock Socket

Code	Description	Colour
43588	Top-mount	Black
43587	Side-mount	
197210	Top-mount	White
197209	Side-mount	



16590
Spare Plastic Hook
Female, with 1 end, Black
Ø int. 30mm



**Spare Plastic Hook, Female,
with 2 ends, Black**

Code	Ø int. (mm)	Colour
44249	25	Black
44246	30	
44245	25	Grey
44248	30	



38579
Spare Plastic Hook
Female, Black, Ø int. 25mm



44243
Hook Double, Plastic
Threaded, Ø30mm, Black



Nuova Rade

Marine - Plastics Technology Experts

Safety



Lifebuoy Rings

URANIO



URANIO Lifebuoy Ring SOLAS

Feature 4 retro-reflecting tapes and a 3 m grabline.
Polyethylene outer structure, filled with polyurethane foam.
Stowage height: anywhere up to 30 m above the waterline.

Code	Ø ext. (cm)	Ø int. (cm)	Height (cm)	Weight (kg)	Buoyancy (N)
16095	75	44	10.5	2.7	142
38095	75	44	10.5	4	142

GIOVE



GIOVE Lifebuoy Ring SOLAS

Feature 4 retro-reflecting tapes and a 3 m grabline.
Polyethylene outer structure, filled with polyurethane foam.
Stowage height: anywhere up to 30 m above the waterline.

Code	Ø ext. (cm)	Ø int. (cm)	Height (cm)	Weight (kg)	Buoyancy (N)
38158	63	40	12	2.5	144

Lifebuoy Ring SOLAS



LALIZAS Lifebuoy Ring SOLAS with Reflective Tape

Designed for pleasure and commercial usage, features an orange, rack hard, cross - linked polyethylene outer shell that will not deteriorate and is unaffected by extreme weather conditions CE approved to SOLAS (L.S.A Code)* by Bureau Veritas*

Code	Ø ext. (mm)	Ø int. (mm)	Weight (kg)	Drop Height (m)
70090	730	440	2,5	80
70110	730	440	4	80

NEW

Saturno



SATURNO Lifebuoy Ring Non-SOLAS

Polyethylene structure. Fitted with a 3 mm grabline.

Code	Ø ext. (cm)	Ø int. (cm)	Height (cm)	Weight (kg)	Buoyancy (N)	Features
44666	57	35	9	1,3	88	Filled with polyurethane foam
12010	57	35	9	0,9	91	No foam-filling

Lifebuoy Ring Accessories

OCEAN®

NEW



Clip-on Lifebuoy Support, for Rail, White

Quick lifebuoy release system. Ideal for all standard lifebuoy rings and horseshoe with 400 mm max circumference. Flexible integral skin foam technology.

Code	Rail Ø (mm)	L (mm)	H (mm)	W (mm)	(kg)
197763	25-28	140	120	180	0,45



45185

Holder for Lifebuoy Ring & Light
Glass-reinforced plastic.
Fits easily on any rail Ø 18 to 25 mm.



40212

Lifebuoy Ring Container Standard
Dimensions: 84 x 108 x 31 cm (H x W x Depth)

Container supplied empty.
Buoy must be ordered separately.




196992

Container with Door for Lifebuoy Ring Ø 60 or 75 cm
Features a transparent round opening to check the presence of the buoy.
Dimensions: 90 x 90 x 22 cm (H x W x Depth)

Container supplied empty.
Buoy must be ordered separately.

Accessories for mounting

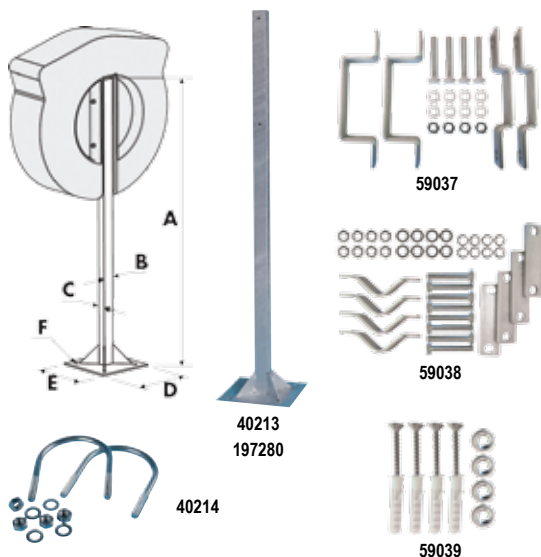

Description	Pole Kit for lifebuoy container		Mounting kit for Ø 6cm rail*	Mounting kit for rail*	Wall mounting kit (bolts + screws)
	Pole	Mounting Kit For Pole			
For standard container model	40213		40214	-	59039
For container with door	197280	59037	-	59038	

*(banister and jetty balustrade)

Code	Model	A (cm)	B (cm)	C (cm)	D (cm)	E (cm)	F (drilling)
40213	Standard container	150	6	4	30	30	Ø 1,5cm
197280	Container with door	200	10	5	-	-	-
59037		-	-	-	25	25	2,3 x 1,1 (oblong hole)

Lifbuoy LED Light

STELLA



196482

STELLA Lifebuoy LED Light SOLAS

Floating lifebuoy light with high-visibility LED light. Very compact lifebuoy light, low power consumption. LED-type flashlight, operates with one R20 alkaline battery. 360° arc of visibility. Dimensions : 160 x 80 x 80 mm. Weight : 90 g. (without battery).

- Light intensity: 2 cd
- Duration: Approx. 8 hours at 60 flash/minute
- Battery: 1 x R20 battery



45184

Clip Holder for STELLA Lifebuoy Light. Fits any tube or rail, horizontal or vertical Ø 20 to 30 mm. Screws not included.

Lifefloats

DELFINO


Approved by
the Italian Merchant Marine

DELFINO Lifefloat Foamfilled with Reflective Tape

Lifefloats approved by the Italian Merchant Marine. Constructed in indestructible plastic material. Filled with polyurethane foam. Provides efficient buoyancy in the event of shipwreck or Man Overboard.

Allows the victims to gather in order to ease survival and rescue. High density polyethylene, filled with polyurethane foam for buoyancy. Fitted with reflecting stripes for added visibility. Braided rope is reeved through reinforced eyelets at regular intervals (2, 3 or 4 eyelets on each side) to account for a larger number of persons grasping the rope.

Code	Persons	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
195392	4	900	900	280	16
195393	8	900	900	280	16
195394	12	980	980	300	23

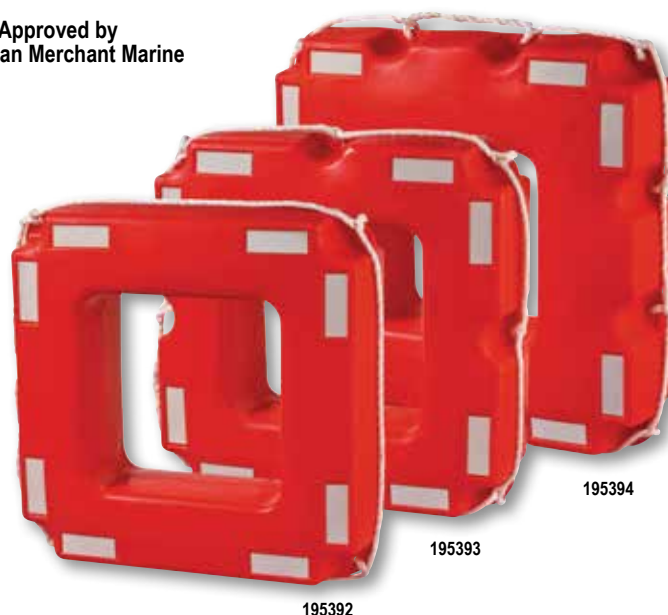

Signaling



Motoring Cone

This signal should be displayed on sailing boats, when travelling under power. Indicates use of mototr on a sailing boat. Folds flat.

Code	Dimensions (mm)
16206	350x340
39552	470x330



Anchor Ball

Internationally recognised daytime signal used by boats when at anchor. Made of tough polypropylene. Folds easily for storage.

Code	Diameter (mm)
16185	300
39553	350

Signaling



Radar Reflector

Made of light alloy. Provided with head plastic protection. Folding model for easy storage when not required. Single packing in a plastic bag.

Code	Description	Dimensions(mm)
97638	STANDARD 12"	215x215x300
97639	R.O.R.C 16"	300x300x415
35000	R.O.R.C 18"	340x340x470



27177


Signaling Mirror with Red Dot
One of the most reliable, effective signalling devices : features an aiming spot to assist you in flashing in the intended direction.
Ø 86 mm.



16183

Fog Horn, Red
Highly resistant polyamide.
Length: 30 cm Ø 8 cm

Safety Ladder

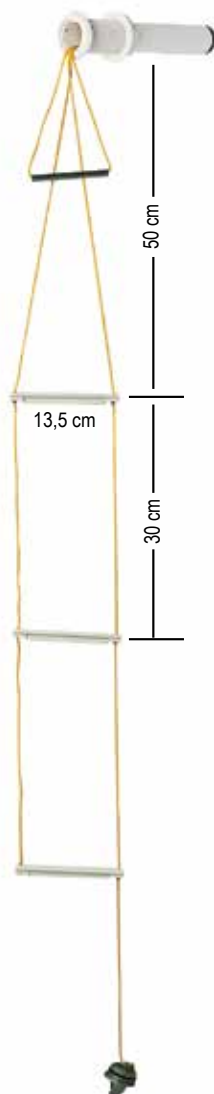

51558

Flushmount Safety Rope Ladder, with 3 Steps

Helps any crewmember get back on board easily without external help.

Suitable for current use (bathing) or in case of Man Over Board.

Consists of 3 polypropylene steps and 1 st. steel handle assembled by a highly resistant line, (bright yellow Ø 3mm polyester).

Ladder is stored in a polyamide tube with a grey polypropylene cap, for optimum protection and waterproofness.

The Man Over Board removes the cap, pulls the ladder down and climbs on board.

- Light
- Very easy flush mount (likr a thru-hull fitting).
- Transom or skirt mount (sail and powder boats), just above waterline.





Nuova Rade

Marine - Plastics Technology Experts

Fishing



Fishing Rod Holders



Rod Holder with Cap, Plastic

Code	Int Diam (mm)	Height (mm)	Colour
37658	40	230	White
37659			Black




Rod Holder, Plastic, Vertical

Code	Int Diam (mm)	Height (mm)	Colour
98678	43	225	Black
98679			White



Rod Holder, Plastic, Vertical

Code	Int Diam (mm)	Height (mm)	Colour
44489	40	235	White
44490			Black



Rod Holder, Plastic, SideMount

Code	Int Diam (mm)	Height (mm)	Colour
44501	40	235	White
44502			Black



37660

Rod Holder Adjustable
For fishing rod, Ø 40 mm maximum. Length : 215mm.
Supplied with 2 sockets (for lateral or flushmount options)



37795

Socket Side-Mount for 37660
Adjustable Rod Holder, Black



37796

Socket Flush-Mount for 37660
Adjustable Rod Holder, Black




31527

Storage Rack (Pair) for 2 Fishing Rods, White
Dimension 23x222x63mm




31529

Storage Rack (Pair) for 3 Fishing Rods, White
Dimension 23x298x63mm



Rod Holding Ring Set

Code	Colour
44622	White
44623	Black

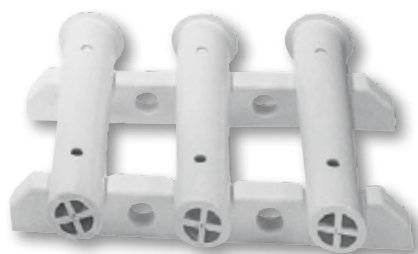

44512

Storage Rack Set for 3 Rods, Bulkhead Mount, White
Length 300 x Height 225 mm



Rod Holder, Sand-Standing

Code	Int Diam (mm)	Height (mm)
44480	40	545
44496		645
44481		765

Angling Accessories



43350
Aquascope Mini,
170x200x410mm (LxWxH)



31409
Aquascope Jointed,
Ø335mm, H.510mm



16381
Surface Float w/Hole,
Cylindrical, white-red
Dimensions: Ø 60 x 140 mm
Hole: Ø 10 mm.



43395
Surface Float w/2 Eyelets, Spherical, white-red
Overall Height: 15cm, Ø 13cm,
top eye 1,2cm, weight: 130gr
Buoyancy: Overall 542gr, In use 271gr



43964
Float for Net, Flexible,
Ø84mm, White



44526
Key-Ring Floating



43605
Container Rectangular for Longline,
Length: 495mm
Width: 400mm
Height: 100mm



43353
Reel for Fishing Line Winding,
Auto-Unrolling,
Ø 165 mm.




Fishing Basket for Longline

Code	Int. Diam. (mm)	Ext. Diam. (mm)	Height (mm)
45508	420	690	345
45509	340	520	195



45256
International Code of Signal Chart, Adhesive
Dimensions: 16 x 12 cm

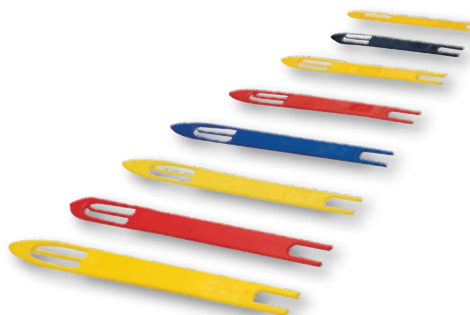


Needle for Fishing Net Splicing

Code	Length (mm)	Width (mm)
43189	120	7
43191	120	10
43193	150	12
43195	175	13
43197	210	15
43199	230	17
43201	250	20
43203	280	23


Gaffs

Telescopic Gaffs

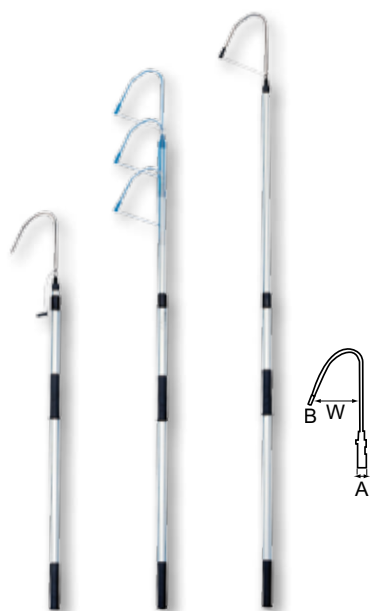

Aluminium

Code	Length (mm)	Ø A (mm)	Ø B (mm)	W (mm)
44586	1300-2150	30	10	150

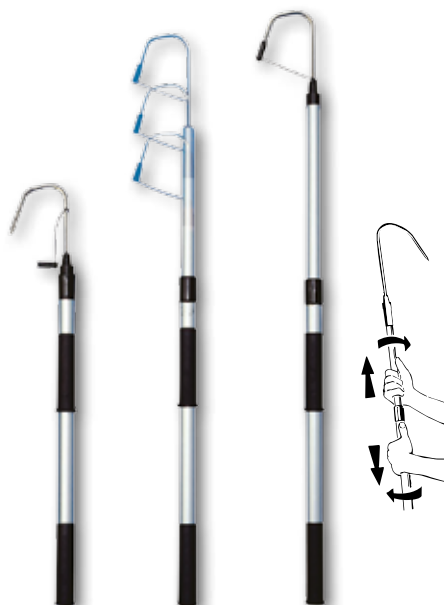

Aluminium


Code	Length (mm)	Ø A (mm)	Ø B (mm)	W (mm)
31408	800-1205	30	8	100



Aluminium

Code	Length (mm)	Ø A (mm)	Ø B (mm)	W (mm)
31407	830-1240	30	8	70

Simple Gaffs

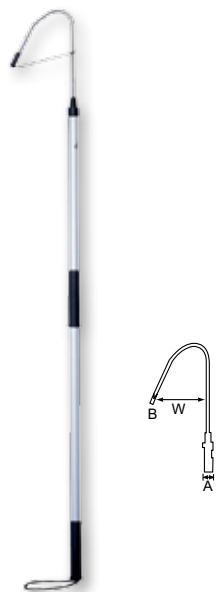

Aluminium

Code	Length (mm)	Ø A (mm)	Ø B (mm)	W (mm)
44585	1450	25	10	150



Aluminium

Code	Length (mm)	Ø A (mm)	Ø B (mm)	W (mm)
44588	790	25	8	70
31406	1035			
44590	1390			



Inox Round Tip Only

Code	Length (mm)	Ø B (mm)	W (mm)
44578	700	6	50



Aluminium

Code	Length (mm)	Ø A (mm)	Ø B (mm)	W (mm)
44581	1015	25	8	100
44582	1370			

A-B-C-D-E-F

Anchor Ball	83
Aquascope	87
Bailer	
Floating	36
Funnel	36
Plain	36
Rigid	36
Ball Valves	52
Barrel Bolt	62
Base	
Battery	36
Tank	32
Battery	
Accessories	36
Base	36
Box	36
Cover	36
Bimini-Tops	
Bottom Socket	66
Clamp-on	65
Clevis fork	66
Eye end	65
Mounting clip	65
Suction disc	66
T - Fitting	65
Wings	65
Boat Cover Support	66
Bracket	
Antenna	62
VHF	62
Buckles	66
Buoy	
For mussel farming	75
Marking	73
Mooring	74
Cable Boots	
Case	68
Cover for Radio/CD	60
For battery switch	60
For control panel	59
For deck filler	43
For electric power shore center	60
For fire extinguisher	59
For mixer tap	40
For shower	43
For shower head	39,42
For toilet paper	59
Storage	58
With cold water tap	39
With deck filler	43
With mixer tap	39

With battery switch	60
With sea water outlet	40
With shower & water tap	41
With shower spray	42
With water inlet	40
With water inlet/outlet	39
With water outlet	39
Cleats	63
Clip	
Adjustable	61
Folding	61
For pedestal	57
Lifebuoy light	83
Support	61
Connector	
Female	34-35
For easy switch plate	23
For line	32
For tank	30,32, 34-35
Male	34-35
Deck Fillers	
Accessories	31
Diesel	31,43
Fuel	31,43
Gas	30
Water	30-31,43
With case	43
With flip top	31
Door Fasteners	62
Drain	
Plug	51
Socket	52
Easy Switch Plate	
Blind	23
Fresh Water	23
Fuel	23
Waste Water	23
Fairleads	
Fender	63
Hook	76
Valve adapter	76
Filter	30
Fishing	
Basket for longline	87
Container for longline	87
Float for fishing net	87
Needle for fishing net	87
Reel for fishing line	87
Flag Staff	62
Flush Pull	62

F-G-H-I-K-L-M-N-O-P

Float

For fishing net	87
Surface	75,87

Fog Horn	84
-----------------	-----------

Footrest	68
-----------------	-----------

Fuel

Valve	34
-------	----

Funnel

Extension	36
Filter	36

Gaffs	88
--------------	-----------

Gauges

Fresh Water	32
Fuel	32
Waste Water	32

Handle	58
---------------	-----------

Handrails	68
------------------	-----------

Handgrip	79
-----------------	-----------

Hatch

Deck	4-16
Escape	3-4
For Dinghies	19
For Gas Bottle	9
For General use	20
For VHF/RadioCD	20
Gasket	3-17,19-20
Handle	3-14,17
Inspection	15-19
Lock	4-17,20
Opening Stay	3-4
Screw cap	3
Spare Key	3-4,18
Storage	5-14,20,58
Utility	19,58
With Drawers	5,10,12
With Removable Bag	18
With Removable Cover	14,16-17
With Storage Bag	12-14

Hinges	61
---------------	-----------

Hook

Aluminium	78
Anodised Aluminium	78
Fitting	79
Floating	78
For inflatable boat	63
Multi-purpose	64
Pine	79
Snap	63-64
Spinnaker	64
Telescopic	79

Hose

Accessories	34
Fuel	34
Hose adaptor	52
Hydrofoil	37

International Code	85
---------------------------	-----------

Key-Ring Floating	87
--------------------------	-----------

Kill Switch Key

With coil lanyard	37
-------------------	----

Ladders

Accessories	71
Bow	69-70
Foltable	70-71
Platform	69
Raft	69
Safety	84
Step	71
Transom	69

Lifebuoy Light	83
-----------------------	-----------

Lifebuoy Ring

Container	82
Holder	82
Mounting	82
Non-SOLAS	81
Pole	82
SOLAS	81
Support	82
Lifefloats	83

Mooring Buoy

Bi-conical	73
Rigid plastic	73

Mooring Compens	76
------------------------	-----------

Motoring Cone	83
----------------------	-----------

Non-return Valve	51
-------------------------	-----------

Oar Collar	79
-------------------	-----------

Oarlock	79
----------------	-----------

Oil Measurer	36
---------------------	-----------

Outboard Engine

Flusher	37
Tiller Extension	37

Paddle

Blade	79
End cap	79

Paddles

Canoe	77
Dismountable	76

P-R-S-T-V-W

For Inflatable Boat	76-77
Jointed	76-77
Kayak	77
Telescopic	77
With Double Hook	76-77

Pole	74
-------------	-----------

Primer Pulbs	34
---------------------	-----------

Pump

Diaphragm	44
Hose	44
Waste with macerator	44
Water	44

Radar Reflector	84
------------------------	-----------

Rigging Screw Cover	64
----------------------------	-----------

Rod

Holder	86
Holding ring	86
Storage Rack	86
Support flush mount	86
Support side mount	86

Sender

Diesel	32
Fuel	32

Sensor

Stainless Steel 316	32
Tank	32

Shackle	62
----------------	-----------

Shower

Head	42
Hose	42

Signaling Mirror	84
-------------------------	-----------

Solar Cell	55
-------------------	-----------

Spreader Boots	64
-----------------------	-----------

Steps	71
--------------	-----------

Storage Bottle	36
-----------------------	-----------

Strainer	53
-----------------	-----------

Table

Bottom Plate	57
Pedestal	57
Top	57
Top Plate	57

Tank

Accessories	23,30,32,36
Fixed	23-28
Flexible	28
Fresh Water	23-24
Fuel	23-24,28-29
Portable	29
Sensor	32
Waste Water	23,25-28

Thimbles	65
-----------------	-----------

Thru-Hull

Easy mount	45
Elbow	49,51
Kit	48
Outlet	51
System	50
Telescopic	50
Threaded	45-50
With displaced hose barb	48
With flush flange	45-46
With hose barb	45-46,48
With non-return valve	50
With standard flange	47-49

Toilet Paper Holder	59
----------------------------	-----------

Transom Pads	67
---------------------	-----------

Tube Socket	65
--------------------	-----------

Twist Stud	64
-------------------	-----------

Valve	30
--------------	-----------

Ventilation

Cover	53,55
Clam shell	54
Double	54
With gasket	53

Ventilator

Connector	53-55
For Tank	30
With water outlet	54

Water

Mixer Tap	39
Pump	44
Washer for screw	964-65

NOTES



Nuova Rade

Marine - Plastics Technology Experts

EXPERIENCE

- More than 50 years of industrial expertise in supplying the boating trade.
- An exceptional know-how in plastic material engineering, from traditional plastics to the latest generation technopolymers.

PRODUCTION

- An impressive production capacity: injection presses from 70 to 680 tons and brand new blowmoulding machines.
- Undisputed leader in plastic engineering, with the capacity to manufacture products with no size or color limits.

QUALITY

- Selection of premium quality material.
- Permanent and utmost care in every phase of the development.
- Stringent control of production processes.

INNOVATION

- Continuous development of new products and search for new technologies and materials.

SERVICE

- Warehouse area exceeding 10.000 m².
- Our sales team and commercial network ensures a closer relationship with our customers.



Nuova Rade
Marine - Plastics Technology Experts

Via Fontanelle 22,
16012 Busalla (Ge)
Italia
Tel: +39 010 96801
Fax: +39 010 9680150-159
P.IVA & C.F: 02153990995
www.nuovarade.com
contact@nuovarade.com

